









"

New Solutions, **Transformed Experience: Discover Our Innovations**

Dear customers and valued business partners,

We're very proud to present our new range of products, which are the result of our ongoing commitment to innovation and meeting the needs of a rapidly evolving market. Each year, we strive to offer ever more efficient, accessible and sustainable products to support the growth of the pool and wellness sector.

A radically changing sector

As we face new technical and environmental challenges, we're committed to developing solutions that combine efficiency with sustainability and responsibility. By working directly with you, the professionals, we're constantly adapting our products to meet the needs of today and tomorrow.

A comprehensive range and commitment

Building on our experience in the world of heat pumps, we have expanded our range to include solutions for all types of pool equipment, as well as an increasingly diverse range of wellness products. This commitment is based on our core values of performance, reliability and sustainable innovation. Our equipment is designed to ensure optimum efficiency while reducing environmental impact, allowing you to build more sustainable and energyefficient installations.

Your partner in transforming the pool and wellness experience

We invite you to discover our solutions designed to meet the specifications and expectations of your wellness customers. Together, let's build a future where innovation and responsibility sustainably transform the way we enjoy the pool and relaxation experience.

Thank you for placing your trust in us,

The Poolstar team



THE GROUP

Poolstar's latest innovations and news

THE PRO RANGE

· HEATING OPTIONS..

Heat pumps for pools.

· FILTRATION OPTIONS Filtration pumps, cartridge filters a

 TREATMENT OPTIONS Salt chlorinators.

• WELLNESS OPTIONS Heating for indoor and outdoor sau

• EXTRA OPTIONS Poolican, fire protection pump, outd

OFFERS AVAILABLE AT MAJOR RETAILERS & ONLINE

6	4
	.16
nd sand filters.	.36
inas and spas.	.60
oor showers, aquafitness.	.98



FRENCH — **DESIGN AND INNOVATION**

At our facilities in Rousset, we design, test and develop the products of tomorrow with passion.

R&D OFFICE

designers and pool professionals, our Research & Development design. With a passion for pools, it is these people who breathe life into our innovative concepts, with the mantra of providing intuitive and efficient products.

TEST CENTRE

Comprised of engineers, product We test our prototypes on our test benches and in our test pools in real-world situations. Over a office is at the heart of our product hundred tests are carried out each year to ensure our exacting you to our new showroom, standards are met.

TRAINING CENTRE

We have revamped the way we deliver professional and technical training for our products. A new team is now in place to welcome demonstrating best practices and helping you get to know our products.

OUR CSR COMMITMENTS

Corporate responsibility (improving employee well-being and promoting a positive work environment)

Use of recycled and recyclable

Production lines powered by renewable energy

Emphasis on repairability and promoting the circular economy

(quality products, widespread availability of spare parts and a range of reconditioned products)

Eco-friendly means of transport

materials

Adoption of continuous improvement tools: - NPS (Net Promoter Score) - EcoVadis sustainability rating ecovadis

EXCLUSIVE SERVICES FOR PROFESSIONALS

From the very beginning, Poolstar's mantra has been to listen and engage with you, our professional customers, and this is why we've put in place the following:

TOOLS TO SUPPORT YOUR BUSINESS THROUGH YOUR CLIENTS

Simple and effective tools for end consumers who want more information about their products before and after they buy:



A pro hotline

For a quick response to your enquiries, there's only one number to call, even if you're on site!

Customer support: +33 (0)4 91 46 60 50



Knowledge through training

Whether it's internal training for our teams, or training for customers and installers, we have a training calendar that allows everyone to benefit from business and technical training to improve the quality of our service.

Sizing, use, installation and helpful tips, you can now be a Poolstar expert.

Video chat: 85% of issues resolved on the first call


With over 1000 video chats since 2020, this is the percentage of problems solved on the very first call. Yet another reason to ask for video support! Make an appointment directly from "Espace Pro", your personal space dedicated to pros.



Our network of refrigeration experts will travel to your customers

Our network of experts travel to your customers to carry out work on refrigeration systems after a visual diagnosis by one of our team members, enabling us to achieve an average repair time of 10 days.





A simplified guide to choosing the right heat pump for end users

To help make the right choice, users can quickly understand which heat pump will be most suited to their pool, from 5 to 250 m³, regardless of their geographic location.

Available on www.poolex.fr

Video tutorials & helpful tips

Because a picture is worth a thousand words, our tutorials help users understand how a product works, how to install it and how to get started.





Store locator

So that individual customers can find the point of sale closest to them and make an appointment online in your store.



Simple products & easy to use

Our products are designed to be simple and easy to use, with an intuitive design and engineered to work.



An effective and efficient way to receive support

You can find everything that your customers need in our support section: a Chatbot to answer frquently asked questions, downloadable manuals, and all of the spare parts available for our products.

Available on assistance.poolstar.fr/en

PROFESSIONAL SPACE

You can find everything you need in one place, saving you time and money.



Energy efficiency scores available online

A complete tool for sizing your heat pump.




Customer mode

Mask certain information for your professional appointments.



Video tutorials Advice and installation tips.

Online orders and invoicing In a single click, order, bundle your





Order tracking Know the exact status of your orders.



Inventory status

View stock levels, restock dates and similar products.

Vi
Во





Check your invoices Easily find all of your order history.

SAV View your after-sales documents Instantly check the status of your aftersales documents.



Sales assistance tools Product sheets, manuals and photo packs available.

After-sales tools Spare parts catalogue and FAQs.

SALES ASSISTANCE

The right tools to get the job done



Store Locator

This service provides you with visibility so that customers can purchase directly from your store.

POS display and communication materials

111/301

A complete set of tools to boost your sales

ONLINE ENERGY RATINGS

An essential step to receive expert advice and make the best choice

Accurately size the heat pump needed for your projects, and access precise projections for energy consumption and installations.

A detailed thermal analysis

Ensures accurate and risk-free sizing when choosing your heat pump.



GET A THERMAL ANALYSIS

Scan the QR code to obtain a detailed thermal analysis and choose the perfect power for your facility!

A wide variety of models

You can choose the model you'd like to work with.

Works for private and private and public pools You only need one tool for all of your customers.

Valid throughout Europe Our calculations are based on the average European weather conditions.

Available on PC, smartphone and tablet Save time, increase accuracy, improve responses.

Calculate predicted operating costs

We show you theoretical operating costs, providing complete transparency with your customer base.

POOL OPTIONS

Everything you need for a high performance, environmentally friendly and fully connected equipment room.



HEATING



FILTRATION



TREATMENT





OUR TOP PICKS





ULTRA HIGH PERFORMANCE NF CERTIFIED HEAT PUMP





INTELLIGENT SALT CHLORINATOR



ICE SPA

OUTSTANDING SPA HEATING





A CONNECTED AND INTELLIGENT SWIMMING POOL





WiFi-Link **WIFI ANTENNA** & OUTDOOR 4G ROUTER

WiFi-Link lets you connect up to 25 devices to the internet within a 50m radius of the pool.







OUR DEDICATED POOLEX APP

Compatible with all connected Poolex devices, it's easy to install, intuitive to use and lets customers remotely monitor their device.


Available on







Google Play

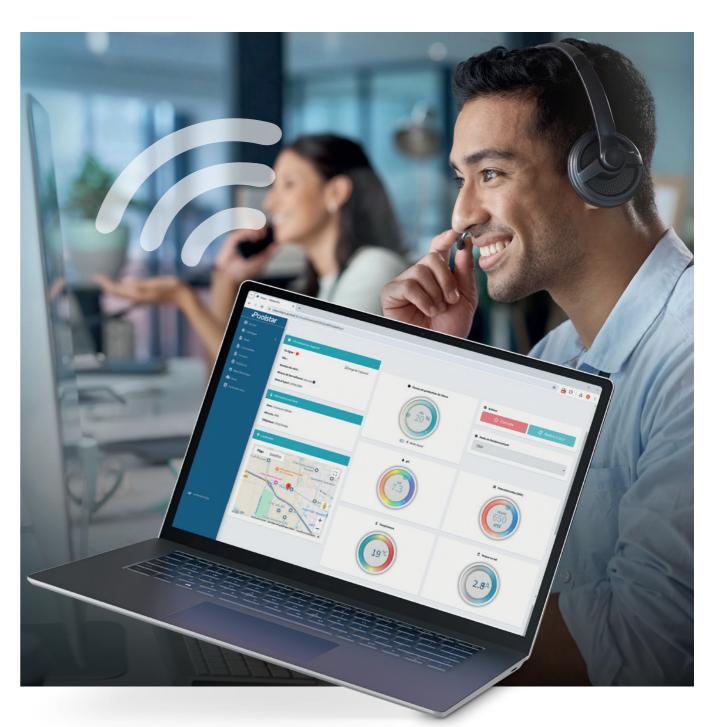

POOLEX CLOUD CENTRALISED INTELLIGENCE FOR EVERYONE'S BENEFIT

Remote diagnostics & set up

- Check and change settings remotely
- Generation Identify faults
- Avoid unnecessary call-outs
- G Reduce downtime for connected products
- Get proactive

P. 36

Manage water and data

← Check the status of connected devices

- C Analyse water quality
- Analyse usage and needs
- G Support R&D for innovation and continuous improvement

POOLEX



	JET PRO	JET CITY	JET MAX	VERTIGO FI
Swimming pool type	In-ground	In-ground	In-ground + Communal	In-ground + Communal
Pool volume	< 135 m ³	< 40 m ³	< 185 m ³	< 250 m ³
SCOP	А	А	А	А
Full Inverter tech- nology	\bigcirc	\odot	\odot	\odot
EVI technology	-	\bigcirc	-	-
Ventilation		2D		
် ာ Reversible	\bigcirc	\bigcirc	\bigcirc	\odot
WiFi connection Remote control	\bigcirc	\bigcirc	\bigcirc	\odot
Cloud access	\bigcirc	\bigcirc	\bigcirc	\odot
OTA (Over-the-air) Remote software upgrades	-	\odot	\odot	-
Smart Grid Ready	\bigcirc	-	-	-
Operates down to	-20°C	-25°C	-20°C	-10°C
Silent Mode	\odot	-	\odot	\odot
Automatic de-icing	\bigcirc	\bigcirc	\bigcirc	\odot
Refrigerant type	R32	R32	R32	R32
Warranty	5 years	5 years	5 years	5 years

SILENT JET FI	ARCTICLINE R290
In-ground	In-ground
< 150 m ³	< 100 m ³
-	-
\odot	\odot
-	\odot
\odot	\odot
\odot	\odot
-	\odot
-	 ⊘ ⊘ ⊘ ⊘ ⊘
-	-
-7°C	-25°C
\odot	\odot
\odot	\odot
R32	R290
3 years	5 years

*In extreme conditions, the heat pump maintains the temperature of the water. Ensure correct sizing by performing a thermal analysis.



Communal

Unlimited (heat pumps can be connected in series)

А
A S
-
 ✓ ✓
\bigcirc
\bigcirc
-
_
-
-10°C
\odot
-10°C ② ③
R32
3 years



POOLEX – **TECHNOLOGIES**

At Poolex, the demand for performance is at the heart of each and every innovation. Our solutions combine advanced technology, energy efficiency and sustainability to meet the highest expectations. Equipment designed to offer your customers reliability, control and longevity, day after day.


FULL INVERTER TECHNOLOGY

Full Inverter technology of Poolex heat pumps ensures maximum efficiency.

By automatically modulating its performance, it reduces energy consumption, provides continuous comfort and increases service life. The compressor adapts its output according to demand and the fan speed adjusts automatically.

UP TO ENERGY SAVINGS

compared to an on/off heat pump

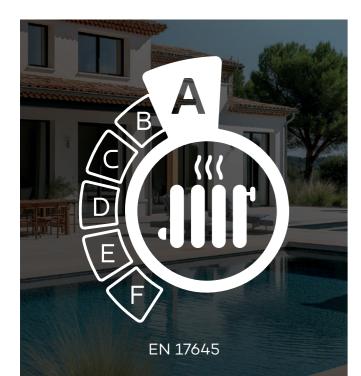

WHAT IS SCOP?

SCOP (Seasonal Coefficient Of Performance) is an essential energy efficiency indicator for a heat pump or filter pump. It evaluates performance over the course of an entire season, from May 1st to September 30th.

Unlike COP (Coefficient Of Performance), which measures efficiency at a specific point in time under ideal conditions, SCOP incorporates variations in outdoor temperature and operating cycles over an extended period of time. It is based on three temperature references ranges: 7°C, 15°C and 26°C.


PREMIUM QUALITY



The heat pumps specifications in this document are provided for information purposes only and are subject to change without notice in order to improve product guality and performance. They are the result of laboratory testing under controlled conditions and may vary depending on the actual conditions of use Acoustic measurements were taken in a soundproof laboratory. As a result, the perceived sound level may differ from outdoor installations due to various environmental factors (reverberations, obstacles, weather conditions, etc.).



INNOVATIVE VENTILATION SYSTEMS

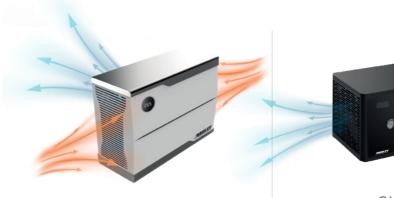

REAR





Benefits

- Energy savings: the Full Inverter compressor limits peaks and reduces power consumption.
- Quieter: continuous and controlled operation.
- More durable: reduces wear associated with on/off cycles.

OUR **CERTIFICATION*** *Only for Jet Pro

NF certified heat pumps are guaranteed to comply with energy efficiency and sound level limits and are renewed every year. NF certified heat pumps benefit from superior quality construction.





The Jet Pro range is the **new gold standard in heat pumps**, combining state-of-the-art technology, ease of use, superior quality and a commitment to the environment. Designed for optimum performance, this range is packed with innovative technologies and delivers exceptional performance.

WARRANTIES

- 5 years: all components
- •7 years: compressor
- 15 years: titanium coil

CLASS A SCOP > 7 EN 17645

NF certified heat pumps are guaranteed to comply with energy efficiency and sound level limits and are renewed every year. NF certified heat pumps benefit from superior quality construction.

		75	95	125	155	155 Tri	180	180 Tri	
	Product code: PC-JET	075	095	125	155	155T	180	180T	
Pool	Northern Europe	30-40 m³	40-55 m³	50-70 m³	65-95 m³	65-95 m³	80-115 m³	80-115 m³	
volume	Southern Europe	40-55 m³	50-70 m³	65-95 m³	80-115 m³	80-115 m³	110-135m³	110-135m³	
SCOP		7.3	7	7.12	7.12	7.09	7.04	7.08	
Air 26°C Water	Output power (kW)	2.9 ~ 10.3	2.9 ~ 12.8	3.8 ~ 16	3.8 ~ 18.7	3.8 ~ 18.7	3.8 ~ 21.8	3.8 ~ 21.8	
26°C	Power consumption (kW)	0.24 ~ 1.56	0.24 ~ 2.13	0.31 ~ 2.67	0.31 ~ 3.3	0.31 ~ 3.3	0.31 ~ 4	0.31 ~ 4	
Humidity 80 %	СОР	12.1 ~ 6.6	12.1 ~ 6.0	12.4 ~ 6.0	12.4 ~ 5.7	12.4 ~ 5.5	13.57 ~ 6.95	12.4 ~ 5.5	
Air 15°C	Output power (kW)	1.9 ~ 7.3	1.9 ~ 9.3	3.5 ~ 12.8	3.5 ~ 15	3.5 ~ 15	3.5 ~ 17	3.5 ~ 17	
Water 26°C Humidity	Power consumption (kW)	0.29 ~ 1.56	0.29 ~ 2.09	0.46 ~ 2.84	0.46 ~ 3.40	0.46 ~ 3.40	0.46 ~ 4	0.46 ~ 4	
70 %	СОР	6.55 ~ 4.69	6.55 ~ 4.45	7.6 ~ 4.5	7.6 ~ 4.5	7.6 ~ 4.5	7.6 ~ 4.3	7.6 ~ 4.3	
Power su	pply		Single-phase 2	20-240V ~50Hz		Three-phase 380- 415V / 3N~50Hz	Single-phase 220- 240V ~50Hz	Three-phase 380- 415V / 3N~50Hz	
Heating t	emperature range	15 °C ~ 40 °C							
Operatin	g range*	-20 °C ~ 43 °C							
Max. outp	out (kW)	2.2	2.6	4.2	4.2	4.2	5.3	5.3	
Flow rate	(m³/h)	3.1	3.9	6.9	6.9	8.3	6.9	8.3	
Circuit b	reaker (A)	16 20				10	25	10	
Cable su	pplied (10 m)	RO2V 3x2.5 mm² RO2V 3x4 mm² RO2V 5x2.5 mm² RO2V 3x6 mm² RO2V						RO2V 5x2.5 mm ²	
Refrigera	nt	R32							
Packagin	g dimensions (mm)	1065 x 485 x 845							
Dimensio	ns (mm)	988 x 365 x 712							
Net / gro	ss weight (kg)	46	/52			53/59			
Noise lev	el at 1 m (db(A))	48	52	56	56	56	58	58	
Noise lev	el at 10 m (db(A))	28	32	36	36	36	38	38	
Compres	sor				GMCC - Rotary				
Heat exc	hanger			Twis	sted Tech© Titar	nium			
Mode				Heating + Cool	ing: Boost / Smo	irt (Silent) / Eco			
Pressure	loss (mH2O)	0.5	0.7	2.2	2.2	2.2	2.8	2.8	
Accesso	ries	Included	: PVC connector	s Ø 50mm 1" ½ / Opt	Wired controller ional extra: Big I		/ Condensate d	rain hose	



STRATEGY: N ZERO



PRODUCTION

+The manufacturing plant has SGS certification and is powered entirely by green, zero-carbon energy.



PRODUCT

Herever possible, the product and its packaging use recycled plastic and recyclable materials.







Class A Performance SCOP >7



extreme conditions (-10°C)





Jet City is the ideal **mini heat pump** for bathing all year round, even in the most extreme temperatures. Designed for pools up to 40m³, it delivers performance comparable to larger models, yet remains ultra quiet and compact.

WARRANTIES

• 5 years: all components

८)

Ultra quiet

- •7 years: compressor
- 15 years: titanium coil

HIGH PERFORMANCE

thanks to

EVI TECHNOLOGY

By injecting additional vapour into the compressor at low temperatures, EVI (Enhanced Vapour Injection) improves the energy efficiency of refrigeration and air conditioning systems.

Extreme efficiency: COP of 2 at -10°C



	Product code: PC-JETC	055				
	Northern Europe	< 25m ³				
Pool volume	Southern Europe	< 40m ³				
SCOP		7.4				
Air 26°C	Output power (kW)	3.3 ~ 7				
Water	Power consumption (kW)	0.28 ~ 1.4				
26°C Humidity						
30 %		11.9 ~ 5				
Air 15°C Water	Output power (kW)	2.3 ~ 5.4				
26°C	Power consumption (kW)	0.35 ~ 1.1				
Humidity 70 %	СОР	6.6 ~ 4.9				
Air -10°C	Output power (kW)	2.6 ~ 3.35				
Nater 26°C	Power consumption (kW)	0.98 ~ 1.5				
Humidity 70 %	СОР	2.65 ~ 2.23				
Air -15°C	Output power (kW)	3.2 ~ 3.7				
Water 26°C	Power consumption (kW)	0.87 ~ 1.2				
Humidity	COP	3.7~3				
70 %		Single-phase 220-240V~50Hz				
Power supply		15 °C ~ 43 °C				
Heating temperature range Cooling temperature range		5°C ~ 43°C				
Operating		-25 °C ~ 43 °C				
Max. outp		1.7				
Flow rate		3				
	reaker (A)	10				
Cable sup	oplied (10 m)	RO2V 3 x 2.5 mm ²				
Refrigera		R32				
- Packagin	g dimensions (mm)	910 x 550 x 540				
Dimensio	ns (mm)	705 x 490 x 505				
Net / gros	ss weight (kg)	48 / 43				
Noise lev	el at 1 m (db(A))	45				
Noise lev	el at 10 m (db(A))	28				
Compres	sor	GMCC - Rotary				
Heat exc	hanger	Twisted Tech© Titanium				
Mode		Heating + Cooling				
Pressure	loss (mH2O)	0.3				
Accessor	ries	Included: PVC connectors Ø 50mm 1" ½ / Hose clamps (2 sets) / Condensate drain hose / Winte storage cover. Optional extras : Colour touch screen + 10m cable to connect to the unit.				
tempera	ture of the water. Carry out a thermal and	alysis to ensure correct sizing.				





ABSOLUTE POWER FOR XL POOLS

JEEMAX

 \bigcirc Optimised Full Inverter technology with Class A SCOP > 8.5 : High-performance and energy efficient, operating in temperatures ranging from -20°C to 43°C.

G Smart connectivity: Control your heat pump remotely over Wi-Fi and with the Poolex app. Receive maintenance alerts for optimal monitoring via connection to the Poolex cloud and remote software upgrades thanks to OTA technology.

CLASS A SCOP> EN 17645



Class A Performance SCOP >7



-20°C to 43 °C



Single-phase and three-phase



Ultra-quiet

POOLEX

The Jet Max range is the perfect heat pump for modern large swimming pools. Combining state-of-the-art technology, ease of use and **superior quality**, it's ready to meet the highest demands. With a premium finish in **hot-dip galvanized steel**, Jet Max combines elegant aesthetics with exceptional durability.

WARRANTIES

• 5 years: all components

NEW ARRIVALS

2025

- •7 years: compressor
- 15 years: titanium coil

-	Contraction of the second	220	220T	280	280T			
Product code: PC-JETM		220	220T	280	280T			
Pool	Northern Europe	90-120m³	90-120m³	120-145m ³	120-145m³			
volume	Southern Europe	120-145m³	120-145m ³	140-185m ³	140-185m³			
SCOP		8.76	8.68	8.55	8.52			
Air 26°C	Output power (kW)	8.97 ~ 29.71	7.12 ~ 28.97	10.98 ~ 36.19	11.83 ~ 36.13			
Water 26°C	Power consumption (kW)	0.63 ~ 4.82	0.58 ~ 4.66	0.78 ~ 6.17	0.84 ~ 6.17			
Humidity 80 %	СОР	14.36 ~ 6.16	12.28 ~ 6.22	14.08 ~ 5.87	14.08 ~ 5.86			
Air 15°C	Output power (kW)	7.01 ~ 22.54	6.62 ~ 22.55	8.61 ~ 27.31	8.61 ~ 27.15			
Water 26°C Humidity	Power consumption (kW)	0.85 ~ 4.43	0.84 ~ 4.37	1.05 ~ 5.65	1.07 ~ 5.62			
70 %	COP	5.09 ~ 8.25	5.16 ~ 7.88	4.83 ~ 8.20	4.83 ~ 8.05			
Power sup	oply	220-240V~50Hz	380-415V/3N~50Hz	220-240V~50Hz	380-415V/3N~50Hz			
Heating t	emperature range	15 °C ~ 40 °C						
Operating	g range*	-20 °C ~ 43 °C						
Max. outp	out (kW)	6.16	6.10	7.2	7.2			
Flow rate	(m³/h)	9.86	9.86 9.86 11.45		11.45			
Circuit br	reaker (A)	40	16	40	16			
Cable sup	oplied (10 m)	RO2V 3x6 mm ²	RO2V 3x6 mm ² RO2V 5x2.5 mm ² RO2V 3x6		RO2V 5x2.5 mm ²			
Refrigera	nt	R32						
Packagin	g dimensions (mm)	1335 x 547 x 1106						
Dimensio	ns (mm)	1288 x 505 x 955						
Net / gros	ss weight (kg)	123/	/143	129/	150			
Noise leve	el at 1 m (db(A))	42-55	42-55	46-59	46-59			
Noise level at 10 m (db(A))		30	30	32	32			
Compres	sor		GMCC -	Rotary				
Heat exc	hanger		Twisted Tech	n© Titanium				
Mode			Heating + Cooling: Boos	st / Smart (Silent) / Eco				
Pressure	loss (mH2O)	3.3	3.3	3.7	3.7			
Accessor	ies		over / Anti-vibration mountir nsion (10m) / Condensate dro					

G Premium design and durability: Galvanised steel front panel for a more stylish look.

- G Optimal acoustic comfort: Low noise level <30 dB thanks to its ergonomic design.
- G LED indicator: Easy to read operating status of the heat pump.





Vertigo Fi is the gold standard in vertically ventilated heat pumps. Its innovative and compact design makes it particularly suited to confined spaces. This latest generation has been redesigned to combine performance, reliability and energy efficiency with optimum acoustic comfort.

WARRANTIES

- 5 years: all components
- •7 years: compressor
- 15 years: titanium coil

VERTICAL VENTILATION

- Ultra-quiet
- Saves floor space
- Allows use of space in front of the heat pump

		55	75	95	125	155	155T	200	200T	240	240T	зоот
Pro	duct code: PC-VGO	055N2	075N2	095N2	255N2	155N2	155TN2	200N2	200TN2	240N2	240TN2	300TN2
Pool	Northern Europe	5-18m³	30-40m ³	40-55m ³	50-70m³	65-95m³	65-95m³	80-115m³	80-115m³	110-135m³	110-135m³	140-185m³
volume	Southern Europe	30-40m ³	40-55m ³	50-70m ³	65-95m³	80-115m³	80-115m ³	110-135m³	110-135m³	125-155m³	125-155m³	160-210m³
SCOP		7.3	7	7	7	7	7	7	7	7	7	7
Air 26°C	Output power (kW)	1.50 ~ 7.70	1.98 ~ 10.35	2.53 ~ 13.27	3.16 ~ 16.17	4.05 ~ 20.17	4.05 ~ 20.17	5.17 ~ 26.05	5.17 ~ 26.86	6.31 ~ 31.23	6.31 ~ 31.23	7.79 ~ 37.4
Water 26°C Humidity	Power consumption (kW)	0,10 ~ 1,13	0.13 ~ 1.50	0.167~ 1.93	0.206 ~ 2.7	0.267 ~ 3.33	0.267 ~ 3.33	0.37 ~ 4.17	0.37 ~ 4.17	0.41 ~ 4.92	0.41 ~ 4.92	0.51 ~ 6.03
80 %	СОР	15.31 ~ 6.84	15.35 ~ 6.87	15.15 ~ 6.84	15.34 ~ 6.0	15.17 ~ 6.07	15.17 ~ 6.07	14.86 ~ 6.43	14.86 ~ 6.43	15.32 ~ 6.76	15.35 ~ 6.78	15.36 ~ 6.75
Air 15°C	Output power (kW)	1.15 ~ 5.82	1.52 ~ 7.82	2.01 ~ 9.83	2.43 ~ 12	3.15 ~ 15.25	3.15 ~ 15.25	4.15 ~ 20.03	4.15 ~ 20.03	5.38 ~ 24.22	5.35 ~ 24.24	6.31 ~ 29.06
Water 26°C Humidity	Power consumption (kW)	0.16 ~ 1.18	0.20 ~ 1.58	0.26 ~ 2.00	0.323 ~ 2.65	0.418 ~ 3.24	0.418 ~ 3.24	0.56 ~ 4.42	0.56 ~ 4.42	0.72 ~ 5.00	0.70 ~ 4.99	0.84 ~ 5.97
70 %	СОР	7.52 ~ 4.93	7.60 ~ 4.95	7.61 ~ 4.92	7.52 ~ 4.53	7.54 ~ 4.72	7.54 ~ 4.72	7.35 ~ 4.52	7.35 ~ 4.52	7.55 ~ 4.84	7.55 ~ 4.84	7.52 ~ 4.81
Power supply		Single-phase 220-240V-50HzThree-phase 380-415V / 380-415V / 3N-50HzSingle-phase 580-415V / 50HzSingle-phase 380-415V / 50HzThree-phase 380										
Heating	temperature range					1	5 °C ~ 40 °	С				
Operatin	g range*	-10 °C ~ 43 °C										
Max. out	put (kW)	1.6	2	2.8	3.1	3.7	3.7	5.8	5.8	6.5	6.5	8.2
Flow rate	(m³/h)	2.4	3.2	4.1	5.2	6.5	6.5	8.8	8.8	10.5	10.5	12.5
Circuit b	reaker (A)	1	.0	1	.6	25	10	32	16	32	1	.6
Cable su	pplied (10 m)	RO2V 3x2.5 mm ² RO2V 3x4 m		x4 mm ²	RO2V 3x6 mm ²	RO2V 5x2.5 mm ²	RO2V RO2V RO2V 3x10 mm² 5x25 mm² 3x10 mm² RO2V 5x2.5 mm²			x2.5 mm²		
Refrigero	int						R32					
Package	size (mm)	5	570x570x83	0	6	30x630x83	0		7	35x735x112	0	
Dimensio	ons (mm)	5	510x510x69	0	Ę	575x575x79	C		60	60x660x10	30	
Net / gro	ss weight (kg)	33 / 48	38 / 52	44 / 56	63 / 79	68 / 85	70 / 87	90 / 105	90 / 105	97 / 115	100 / 115	115 / 130
Noise lev	el at 1 m (db(A))	36~45	38~46	38~46	41~50	42~52	42~52	47~56	48~57	48~57	48~57	49~59
Noise lev	el at 10 m (db(A))	19~27	20~28	20~28	21~31	24~32	24~32	28~37	29~38	29~38	29~38	30~39
Compres	ssor					GMCC	- Rotary					Mitsubishi
Heat exc	hanger					Twiste	ed Tech© Tit	tanium				
Mode						Heating +	Cooling: B	oost / Eco				
Pressure	loss (mH2O)	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
Accesso	ries			Includ		ration mour				1" ½ /		


*In extreme conditions, the heat pump maintains the temperature of the water. Carry out a thermal analysis to ensure correct sizing.



THE WIDEST **RANGE ON** THE MARKET 11 POWER RATINGS





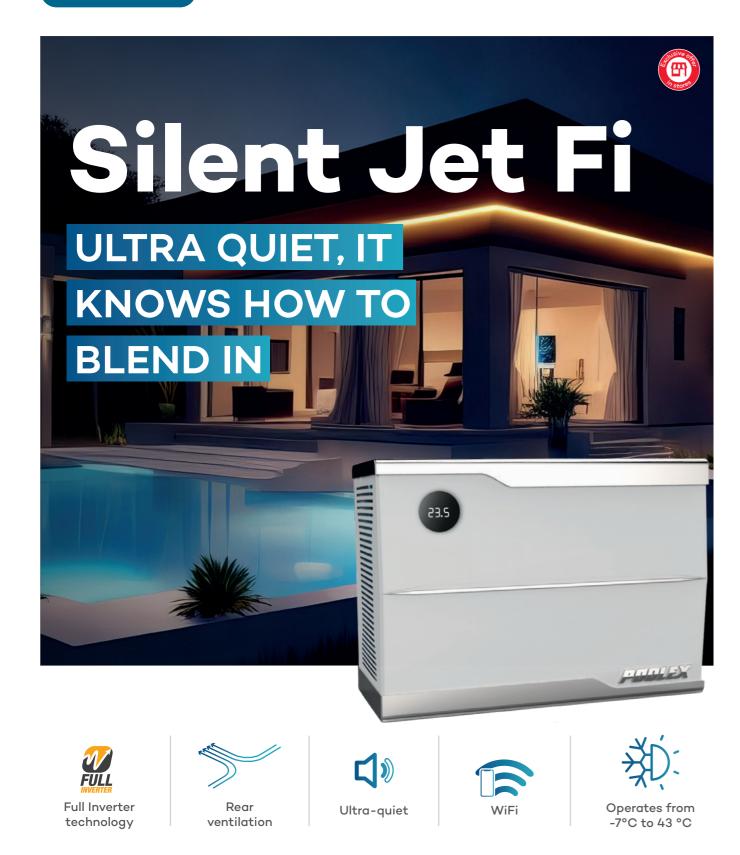

The Silent Jet Fi's innovative Full Inverter technology optimises energy efficiency and minimises noise. By adjusting its power output depending on the temperature, it uses up to 35% less energy than a traditional on/off pump. The compressor and fan rarely operate at full power, reducing noise levels, while the rear-facing fan ensures the Silent Jet Fi remains discreet. Its high-performance and elegant design allows it to blend seamlessly into any outdoor space.

WARRANTIES

- 3 years: all components
- •7 years: compressor
- 15 years: titanium coil

REAR VENTILATION ULTRA QUIET

Say goodbye to cold air expelled towards the front thanks to **rear ventilation**. This solution substantially decreases sound pressure while retaining top-of-the-line performance. This architecture, combined with Full Inverter technology, makes this heat pump incredibly **silent**.

								4		
		60	90	120	160	160 T	210	210 3-PHASE		
	Product code: PC-SLT	060	090	120	160	160T	210	210T		
Pool volume	Northern Europe	8-25m ³	35-50m³	50-70m ³	65-85m³	65-85m³	80-115m³	80-115m ³		
Poor volume	Southern Europe	35-50m³	50-70m³	65-85m³	80-115m³	80-115m³	115-150m³	115-150m³		
Air 26°C	Output power (kW)	2.46 ~ 7.8	2.2~12.5	2.4~15.5	3.3~21.5	3.3~22	4.3~27	4.3~27		
Water 26°C Humidity	Power consumption (kW)	1.3~0.18	1.93~0.22	2.35~0.25	3.33~0.31	3.34~0.25	4.3~0.27	4.3~0.27		
80 %	COP	13.5~6.1	16.5~6.1	16.6~6.5	16.7~6.2	17.1~6.6	16.5~6.3	16.5~6.3		
Air 15°C	Output power (kW)	1.4~6.1	1.6~9.05	1.9~11.5	2.48~16	2.6~16	3.2~20.5	3.2~20.5		
Water 26°C Humidity	Power consump- tion (kW)	1.3~0.18	1.93~0.22	2.35~0.25	3.33~0.31	3.2~0.33	4.36~0.41	4.36-0.41		
70 %	COP	7.5~4.7	7.2~4.7	7.6~4.9	7.7~4.8	7.9~5.0	7.8~4.7	7.8~4.7		
Power supply			Single-phase 220-240V~50Hz Three-phase 380-415 V / 220-380-415 V / 220-380-50 Hz 240 V-50Hz							
Heating ter	nperature range	15~40 °C								
Cooling ten	nperature range	8~28 °C								
Operating r	ange*				-7~43 °C					
Max. output		1.7	2.6	3.2	4	4	5.3	5.3		
Flow rate (n	1.	2-4	4-6	5-7	7-9	7-9	9-11	9-11		
Circuit bred	aker (A)	10	16 20		10 RO2V 5x2.5	2	5			
Cable supp	lied (10 m)	RO2V 3x2.5 mm ² RO2V 3x4 mm ² RO2V 3x4 mm ² RO2V 3x6 mm ² RO2V 3x6 mm ² RO2V 5x2.5						RO2V 5x2.5 mm ²		
Refrigerant		R32								
Packaging d	limensions (mm)	944x420x802	1043x440x802	1147x4	54x882		1279x484x972			
Dimensions	; (mm)	870×355×622	975×376×622	1040×4	06×722		1060×436×822			
Net / gross	weight (kg)	46 / 52	56 / 63.5	69 / 77	73 / 81	89 / 98	92 / 100	92 / 100		
Noise level	at 1 m (db(A))	37~49	38~50	39~51	40~52	40~52	45~56	45~56		
Noise level	at 10 m (db(A))	19~28	19~29	20~30	21~31	21~31	23~35	23~35		
Compresso	or type			Herme	etic Rotary DC In	verter				
Compresso	or brand				GMCC					
Heat excha	inger			Twi	sted Tech© Titan	ium				
Mode				Heating & Cool	ing (Eco / Silent	/ Boost) + Auto				
Pressure lo	ss (mH2O)	1.1	1.1	1.1	1.1	1.1	1.1	1.1		
Accessorie	s	Inclu	Ided: Winter store		vibration mountir ain hose. Optiona		ectors Ø 50mm 1	." 1/2 /		

SLEEK & MODERN DESIGN









This refrigerant is environmentally friendly and has a low impact on the climate as it does not contain any greenhouse gas emitters.

		12	16	16 TRI			
	Product code: PC-ARC	120	160	160T			
Pool	Northern Europe	30-50m ³	50-80m³	50-80m³			
volume	Southern Europe	40-65m³	70-100m ³	70-100m ³			
SCOP		7.78	7.53	7.53			
Air 26°C Water	Output power (kW)	15.24~5.15	21.09~8.90	21.09~8.90			
26°C	Power consumption (kW)	2.47~0.41	3.25~0.80	3.25~0.80			
Humidity 80 %	СОР	6.17~12.56	6.49~11.32	6.49~11.32			
Air 15°C Water	Output power (kW)	12.04~3.93	16.15~6.99	16.15~6.99			
26°C	Power consumption (kW)	2.38~0.51	3.16~0.93	3.16~0.93			
Humidity 70 %	СОР	5.06~7.71	7.52~5.11	7.52~5.11			
Air 0°C Water	Output power (kW)	8.05	11.2	11.2			
26°C	Power consumption (kW)	2.29	3.14	3.14			
Humidity 70 %	СОР	3.52	3.56	3.56			
Air -10°C Water	Output power (kW)	7.02	9.08	9.08			
26°C	Power consumption (kW)	2.47	3.5	3.5			
Humidity 70 %	СОР	2.84	2.6	2.6			
Air 35°C Water	Output power (kW)	8.19~5.08	11.2~7	11.2~7			
28°C	Power consumption (kW)	2.97~1.13	4.6~1.5	4.6~1.5			
Humidity 70 %	EER	2.76~4.5	2.45~4.7	2.45~4.7			
Power sup	pply	220-240)V~50Hz	380-415V / 3N~50Hz			
Refrigera	nt	R290					
Compress	or brand		Toshiba				
HEAT exc	hanger		Twisted Tech© Titanium				
Connectiv	vity		WiFi / Cloud Ready / OTA				

thanks to


systems.

*Actual data may differ

Designed to excel in cold environments, the Arcticline R290 heat pump embodies the perfect alliance between R290 technology and **EVI**. With its **Full Inverter** technology, which offers energy savings of up to 35% and its ability to maintain water temperature even in **extreme** conditions, this heat pump is revolutionising the heating of swimming pools all year round in France and across most of Europe.

WARRANTIES

- 5 years: all components
- •7 years: compressor
- 15 years: titanium coil

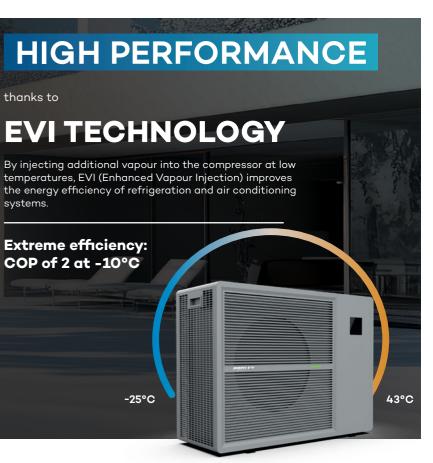



NOT INCLUDED IN PRO RANGE

Megaline

FULL INVERTER TECHNOLOGY FOR XXL SWIMMING POOLS





Class A Performance SCOP >7



Connect as many as you need







-15°C to 43 °C

EGALINE

1 FULL

B

Megaline Fi is the latest generation heat pump designed for XXL pools: communal pools, hotels, campsites, water parks, etc.

Thanks to its powerful Full Inverter technology, it adapts its power output to your needs, saving you energy and reducing noise levels. Constructed from stainless steel and with a powder coated finish, the Megaline Fi is a robust solution for the most demanding environments.

WARRANTIES

- 3 years: all components
- •7 years: compressor
- 15 years: titanium coil

		35	50	70	100			
	Product code: PC-MLP	353N	503N	703N	1003N			
Pool volume		(Contact our experts f	for a detailed analysis				
SCOP		8	8	7.87	7.91			
Air 26°C	Output power (kW)	15.20 ~ 42.50	19.98 ~ 63.34	22.62 ~ 89.80	31.9 ~ 135			
Water 26°C	Power consumption (kW)	7.34 ~ 1.55	10.72 ~ 1.53	13.58 ~ 1.42	19.3 ~ 2.3			
Humidity 80 %	СОР	11.43 ~ 5.79	13.06 ~ 5.91	15.93 ~ 6.61	13.59 ~ 6.98			
Air 15°C	Output power (kW)	16.54 ~ 35	15.4 ~ 50	21.43 ~ 70	23.6 ~ 100			
Water 26°C Humidity	Power consumption (kW)	6.99 ~ 1.55	9.92 ~ 1.91	13.65 ~ 3.05	20.0 ~ 3.1			
70 %	СОР	7.46 ~ 4.80	7.93 ~ 4.76	7.65 ~ 5.05	7.58 ~ 4.99			
Power supp	ly	380-415V/3N~50Hz						
Heating ten	nperature range	15 °C ~ 40 °C						
Cooling terr	nperature range	8 °C ~ 28 °C						
Operating r	ange*	-15 °C ~ 43 °C						
Max. output	t (kW)	9.5	13.46	20	29.8			
Flow rate (n	n³/h)	15	20.5	35	40			
Circuit bred	aker (A)	-	-	-	-			
Cable supp	lied (10 m)	RO2V 5 × 4mm ²	RO2V 5 × 6mm ²	RO2V 5 × 10mm²	RO2V 5 × 16mm²			
Refrigerant			R	32				
Dimensions	; (mm)	1005×936×885	1105×1033×1090	1252×1075×2428	2148×1076×2176			
Net weight (kg)		175	225	448	760			
Noise level at 1 m (db(A))		≤65	≤66	≤70	≤73			
Noise level	at 10 m (db(A))	≤47	≤48	≤50	≤53			
Compresso	r		,	Inverter				
Heat excha	inger		Twisted Tec	h© Titanium				
Mode			0 0	st / Smart (Silent) / Eco				
Pressure los	ss (mH2O)	0.5	0.6	4.2	4.8			

*In extreme conditions, the heat pump maintains the temperature of the water. Carry out a thermal analysis to ensure correct sizing.





ACCESSORIES WiFi-Link **OUTDOOR WIFI ANTENNA OR 4G** ROUTER 0 PUULEX O O 0 0





Up to 25 devices

WiFi-Link is a WiFi antenna or 4G router designed to **connect your pool equipment** in outdoor areas without WiFi. It can connect up to **25 devices** at distances of up to 50 metres. It can be used with a cable connected to the internet access point or with a 4G Nano SIM card*, delivering speeds of up to 150 Mbps. It's also waterproof, making it ideal for outdoor installation.

*not included and subscription required from your internet service provider



IP66 waterproof



2 2

Compact	76 x 152 x 25 mm
Product code	PC-POOLWLNK-4G
Power supply	12 DC 1A
WiFi	2.4 GHz
Connectors	WAN / LAN RJ45
Warranty	2 years



BY-PASS KIT 50

This By-Pass Kit enables you to connect your heat pump to your swimming pool filtration system. Compatible with the entire Poolex range (excluding Megaline).

INCLUDED IN THIS KIT

- 3 valves Ø 50 mm
- 2 elbow connectors Ø 50 mm
- 2 T-connectors Ø 50 mm
- 1 tube of glue
- 1 bottle of stripper

Product code

PC-BYPASS-50



BIG FOOT MOUNTS

Poolex's Big Foot, made from recycled tyres with an aluminium rail, can be fitted to all our heat pumps. Easy to install on flat ground (sand or gravel), their elasticity reduces vibrations and noise.

* excluding Megaline and mini heat pumps

Compact	600 x 180 x 100 mm
Product code	PC-FEET60
Compatibility	The entire Poolex range*
Weight	10.8 kg
Material	Recycled tyre
Weight supported	450 kg



BY-PASS KIT 32/38

This By-Pass kit allows you to connect your "mini" heat pump to the filtration system of your aboveground swimming pool or to any other filtration system.

INCLUDED IN THIS KIT

- 1 three-way valve Ø 50 mm
- 3 adaptors Ø 32/38 mm
- 1 T-connector Ø 32/38 mm
- 6 stainless steel hose clamps
- 1 roll of Teflon

Product code

PC-BYPASS-32



THERMOMETER WITH **REMOTE DISPLAY**

This thermometer measures the temperature in real time thanks to a floating sensor. Data is sent wirelessly to the remote display, ideal for accurate and convenient pool monitoring. Robust and waterproof, it is durable and easy to use.

Product code	PC-THERMO1WS
Waterproof rating	IPX7
Battery	2 AA batteries 1.5V / device (not included)
Warranty	2 years




Quick reminder about filter pumps

A filter pump is an essential part of a healthy swimming pool. It circulates the water through the filter to remove impurities and debris, while distributing chemical products evenly. It keeps the water clean and healthy and is at the heart of water purification and circulation.



HOW TO CHOOSE THE RIGHT PUMP?

Sizing a swimming pool pump depends on several key factors:



Volume of the pool in m³ Rectangle: Lenght x width x height • • Round: (@ x diam x diam /4) x average height



Circulation time 8 hours -> Standard NF16713-1/2/3 Renews water 3 times every 24h (We recommend a circulation time of 6h)



Flow rate of the pump in m³/hour = volume / desired circulation time Warning: to check pressure loss, refer to the graph with TDH (mH20) at 8 to 10 m

WHEN SHOULD IT BE SWITCHED ON?



Season

Rain and environmental conditions

Pool use

		F		E		MULTILINE	VARILINE				
Versions	075	100	150	200	300	150	15H	10P	15P	20P	30P
SCOP	-	-	-	-	-	А	В	В	А	А	А
Flow rate (m3/h) at 10 mH20 If set at 3,000 RPM for Multiline and Variline	12	17	21	24	26	10	12.5	14	17	19	21
Power consumption (P1) (kW)	0.75	1.10	1.50	1.80	2.20	0.580	0.860	0.877	1.055	1.185	1.350
Power consumption for 18hrs of filtration (kW)	13.5	19.8	27	32.4	39.6	10.5	15.5	15.8	19	21.3	24.3
i.e. cost/cycle (€)*	3.37	4.95	6.75	8.1	9.9	2.61	3.87	3.95	4.75	5.33	6.07
Swimming pool type	Ab	ove-gro	und, in-g	ground p	ool		In-ground pool				
Max. recommended pump-pool distance (TDH)	8~10			8~10	8 ~ 10						
Pump type	Single-speed					Multi-speed	Var	Variable speed4 program settings			
Speed modulation			No			1000-3450 RPM		450-3450 RMP			
Motor type	2-	-pole as	ynchron	ous mot	or	Per	manent	magnet s	synchron	ous	
Noise level at 10 m		6	5 to 68 c	ΙB		<45 dB at 1,500 ^{крм}	<45 dB at 1,500 ^{RPM}				
Prefilter						High capacity	,				
Power supply					Single	e-phase 220-240	V ~ 50Hz				
Connections	1"1/2					2"	1"1/2 2"				
Connectors included	Union fitting for solvent cementing					Ø50/63mm	Not included				
Compatible with che- mical & salt treatment	\odot				\oslash	\odot					
Warranty			3 years			3 years	3 years				

* Cost/Cycle = Electricity consumption (KWh) * Electricity price (€/kWh: 0.25€)



FixLine SINGLE-SPEED FILTER PUMP

MultiLine **MULTI-SPEED FILTER PUMP**






2-pole asynchronous motor



The Fixline pump ensures **continuous and effective** filtration with uniform distribution of chemical products. Affordable and compatible with all types of treatment, it combines robustness with durability and low maintenance costs, guaranteeing clean water for many seasons to come.



TLEX **-ix**Line

FIXLINE	0.75	1	1.5	2	3	
Pool volume	70 m³	100 m ³	125 m ³	140 m ³	155 m ³	
Product code	PF-FIX075	PF-FIX100	PF-FIX150	PF-FIX200	PF-FIX300	
Output power (HP) - P2	0.75	1	1.5	2	2.5	
Power consumption (kW) - P1	0.75	1.1	1.5	1.8	2.2	
Connector diameter	1.5"x2" / 50 x 63 mm					
Flow rate at 10 mH2O	12.2 m³/h	16.5 m³/h	21.2 m³/h	24.2 m³/h	26 m³/h	
Weight	13.6	13.8	14	14.2	14.5	
Power supply	Single-phase 220-240V ~50Hz					
Dimensions in mm (L x W x H)	652 x 195 x 308					
Max. current (A)	3.5	5	6.8	8.2	10	
Warranty			3 years			

Permanent magnet synchronous motor




Compatible with

all treatments

The Multiline pump can be manually set to 3 different speeds depending on the use of the pool, giving better energy efficiency than a fixed-speed pump. It ensures optimum filtration by slowing down the flow of water. Equipped with a **digital** control panel and a 1.5m self-priming function, it is extremely quiet.

DIMENSIONS

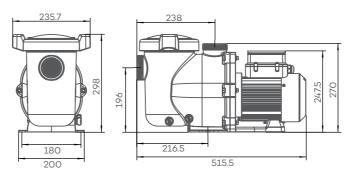

NEW ARRIVALS





1: 9 5	Feet of water	$0 - \frac{3000}{27500} - \frac{27500}{25000} - \frac{25000}{25000} - \frac{200000}{15000} - \frac{200000}{15000} - \frac{200000}{15000} - \frac{2000000}{150000} - \frac{200000000}{150000} - 2000000000000000000000000000000000000$	/min :/min /min								
	1,	, L			40	_	60	80	100	120	-
							U.S.Gallo	ns per minu	ite		
		0	3	6	9	12	15	18	21 24	27 3	7 30

MULTILINE	1.5		
SCOP	Α		
Horsepower	1.5 HP		
Diameter of female connector	2"x2"		
Connectors included	D50 & D63 mm		
Speed modulation	1000 - 3450 RPM		
Max. flow rate at 8 mH20	18 m³/h		
Max. flow rate (m ³ /h)	22 m³/h		
Max. dynamic head (m)	15		
Power supply	Single-phase 220-240V~50Hz		
Max. current (A)	6		
Weight (kg)	8.75		
Warranty	3 years		





Class A Performance SCOP >7

ce Longer service life



WiFi & Cloud





The VariLine offers **energy savings** by **automatically adjusting** the filtration flow rate. It improves filtration quality by slowing down the flow of water through the filter. It also **optimises the performance of your Full Inverter** heat pump by maintaining the water temperature. Now with **WiFi** for remote control and monitoring.


WARRANTY

• 3 years: filter pump



ECONOMICAL FILTRATION

Operating a variable speed pump at 50% for 24 hours reduces energy costs by almost 80% compared to running an On/Off pump for 8 hours.



clogged as quickly.







LONGEVITY

Longer life: Less demand is placed on the motor and compressor, generating less heat and reducing wear. AT low speed, noise levels are reduced by a factor of 4 compared to a fixedspeed pump (<45 dB)

SILENT




VARILINE	15H	10P	15P	20P	30P		
SCOP	В	В	Α	Α	Α		
Product codes	PF-VL15H	PF-VL10P	PF-VL15P	PF-VL20P	PF-VL30P		
Horsepower	1.5 hp	1 hp	1.5 hp	2 hp	3 hp		
Diameter of female connector	1.5"x1.5"	2"x2"	2"x2"	2"x2"	2"x2"		
Motor type	Permanent magnet synchronous						
Speed modulation	450 - 3,450 tr/min						
Flow at 10 mH2O	17.5 m³/h	19 m³/h	22 m³/h	24.3 m³/h	28.2 m³/h		
Max. flow rate	21 m³/h	23 m³/h	27 m³/h	29 m³/h	33.3 m³/h		
TDH (m)	22	22	24	25	26		
Power supply		Single	e-phase 220-240V~	50Hz			
Dimensions in mm (LxWxH)	596 x 270 x 306	306 605 x 270 x 338					
Current (A)	5.5	5.5	7	8	10		
Warranty			3 years				

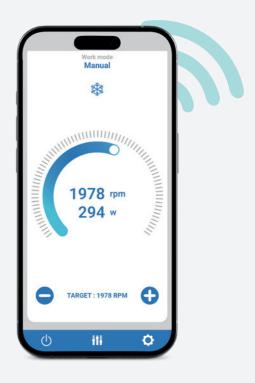

NEW IN 2025

We're proud to present the new edition of the VariLine you have known for several years. It now includes WiFi for easy remote control via the Poolex app and simplified maintenance thanks to the Cloud.





GUIDE Z ATI ECTION R SEL




Cartridge

Туре	of	filter	media
------	----	--------	-------


No. of models	3	4			
Pool size	from 80 to 110 m³	from 110 to 190 m ³			
Cleaning frequency (filter rinsing or tank backwashing)	••0	•00			
Pool type	Above-ground + Residential	Residential			
Filtering capacity	15	μm			
6-way valve	Without				
Cover	Opaque				
Volume of water / hour	from 13 to 19m³/h	from 18 to 32m³/h			
Opening / Closing	Quick rele	ase clamp			
Material	Polypropy	lene fibres			
Tank warranty	10 years				
Built-in filter pump		-			
Input / Output connections	50 / 6	93 mm			



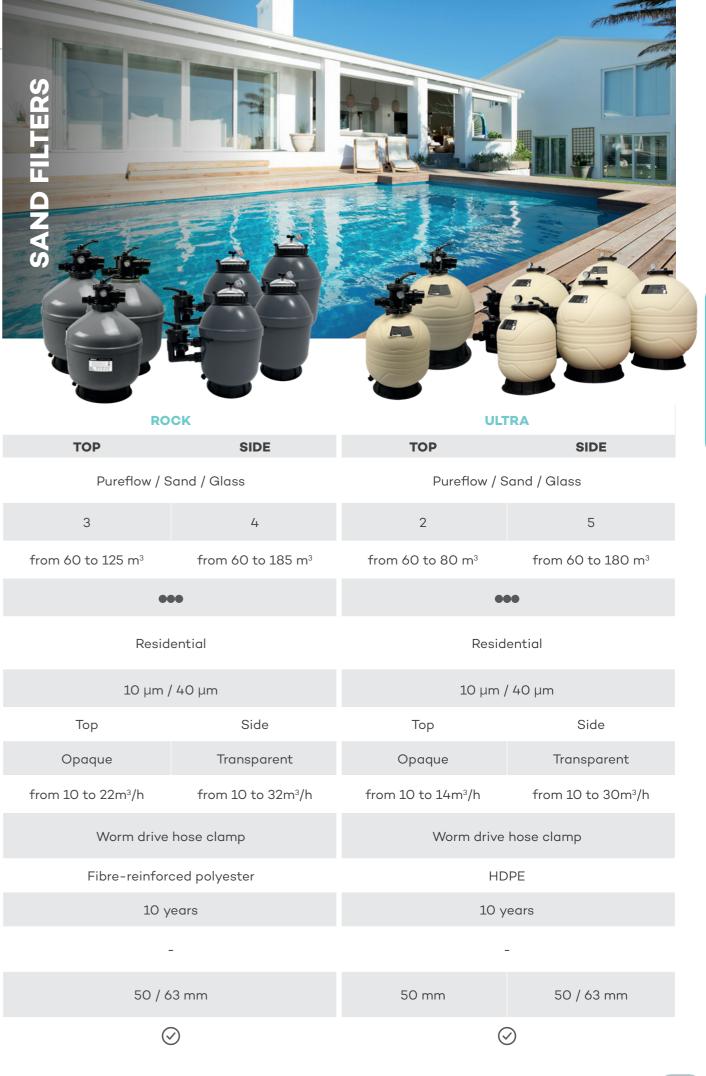

1.41					
Pureflow / S	Sand / Glass				
3	4				
from 60 to 125 $m^{\scriptscriptstyle 3}$	from 60 to 185 m^3				
•	••				
Resid	lential				
10 µm ,	/ 40 µm				
Тор	Side				
Opaque	Transparent				
from 10 to 22m³/h	from 10 to 32m³/h				
Worm drive	hose clamp				
Fibre-reinfor	ced polyester				
10 years					
_					
50 / 6	63 mm				
(•	\mathcal{O}				



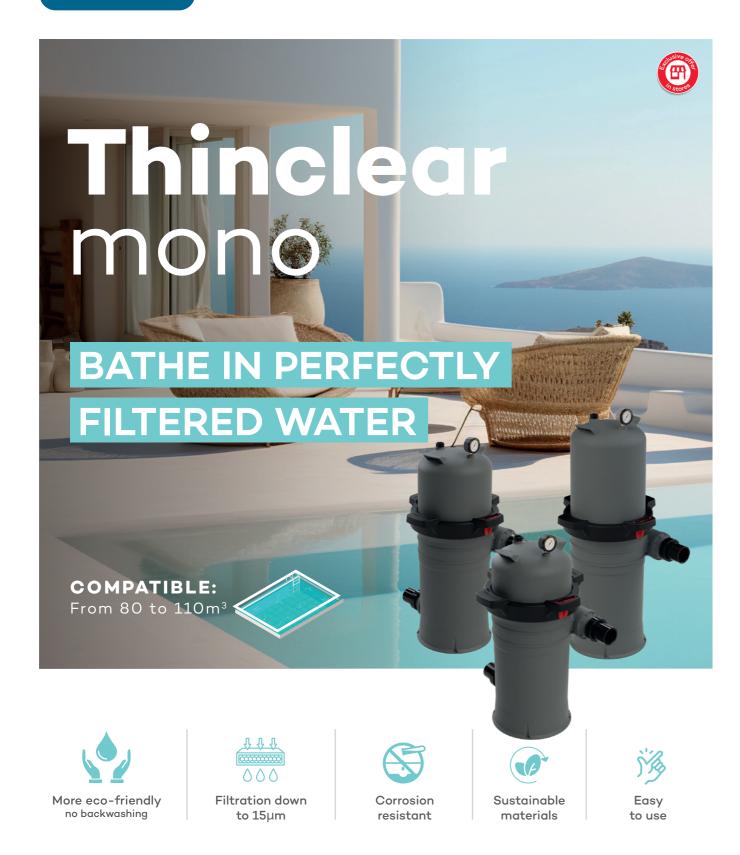

Thinclear Mono provides a large surface area for filtration, capable of removing particles and impurities as small as **15 microns**. A single cartridge can be installed per model, ideal for **pools up to 110 m³**. Each model has a different size cartridge. Unlike sand filters, the cartridges **do not require backwashing** and can be easily cleaned with a hose, **saving a large amount of water** each year.

WARRANTIES

10 years: tank
3 years: valve (excluding seals, domes and pressure gauges)

1 FILTER CARTRIDGE INCLUDED

Cartridge filters are a high-quality solution for filtration, offering exceptional performance thanks to state-of-the-art filtering materials.



Reduced water consumption






Quick release clamp

FEATURES

THINCLEAR MONO	THINCLEAR 100	THINCLEAR
Product codes	PF-TCR100	PF-TCR1
Maximum flow rate (m ³ /h)	22.7	27.2
Recommended flow rate (m ³ /h)	13	17
Filtration area (m²)	9.29	13.94
Volume of water filtered (m ³) (based on an average filtration time of 6 hours)	80	100
Input/Output connections		2"/2.5"- 50/
Dimensions in mm (AxBxC)	825 x 444.5 x 588	910 x 444.5
Dimensions in mm (DxExF)		304 x 335 :
Flow velocity (m³/h/m²)	1.5	1.2
Tank Warranty		10 year



	100	150	200
Product codes	PF-TCR100CT	PF-TCR150CT	PF-TCR200CT
Dimensions G (in mm)	Ø 497	Ø 590	Ø 717
Dimensions H (in mm)		Ø 267	
Filter fineness (µm)		15	
Number of pleats	137	172	187









Filter fineness






Input & output connector





ırs



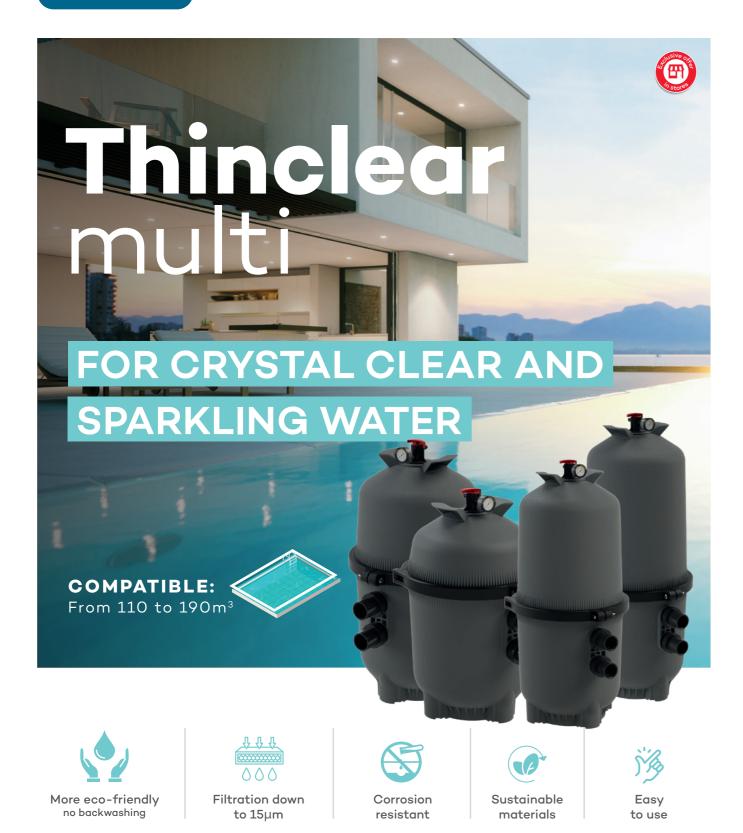

Thinclear Multi provides a large surface area for filtration, capable of removing particles and impurities as small as **15 microns**. Multiple cartridges can be installed for increased filtering capacity, ideal for **large volumes**. Unlike sand filters, the cartridges **do not require backwashing** and can be easily cleaned with a hose, **saving a large amount of water** each year.

WARRANTIES

10 years: tank
3 years: valve (excluding seals,

domes and pressure gauges)



CARTRIDGE FILTERS INCLUDED

Cartridge filters are a high-quality solution for filtration, offering exceptional performance thanks to state-of-the-art filtering materials.



Reduced water consumption






Quick release clamp

FEATURES

THINCLEAR MONO	THINCLEAR 330	THINCLEAR 430	THINCLEAR 530	THINCLEAR 680
Product codes	PF-TCR330	PF-TCR430	PF-TCR530	PF-TCR680
Maximum flow rate (m³/h)	28.1	34.1	34.1	34.1
Recommended flow rate (m³/h)	18	20	25	32
Filter area (m²)	30.73	39.97	49.19	63.17
Volume of water filtered (m ³) (based on an average filtration time of 6 hours)	110	120	145	190
Input/Output connections		2"/2,5"-5	50/63mm	
Dimensions in mm (AxBxC)	886 x 648 x 556	1035 x 648 x 556	1223 x 648 x 556	1362 x 648 x 556
Dimensions in mm (DxExF)		504 x 462 x	317.5 x 444,5	
Flow velocity (m³/h/m²)	0.6	0.5	0.5	0.5
Tank Warranty		10 years		



330	430	530	680			
PF-TCR330CT	PF-TCR430CT	PF-TCR530CT	PF-TCR680CT			
Ø 498	Ø 647	Ø 647 Ø 835				
Ø 178						
15						
198	197	187	209			
	4	8				
	PF-TCR330CT Ø 498	PF-TCR330CT PF-TCR430CT Ø 498 Ø 647 Image: Strate Strat	PF-TCR330CT PF-TCR530CT Ø 498 Ø 647 Ø 835 Ø 835 Ø 835 Ø 835 Ø 835 198 197 187			

46



Easy maintenance




Filter fineness





Input and output



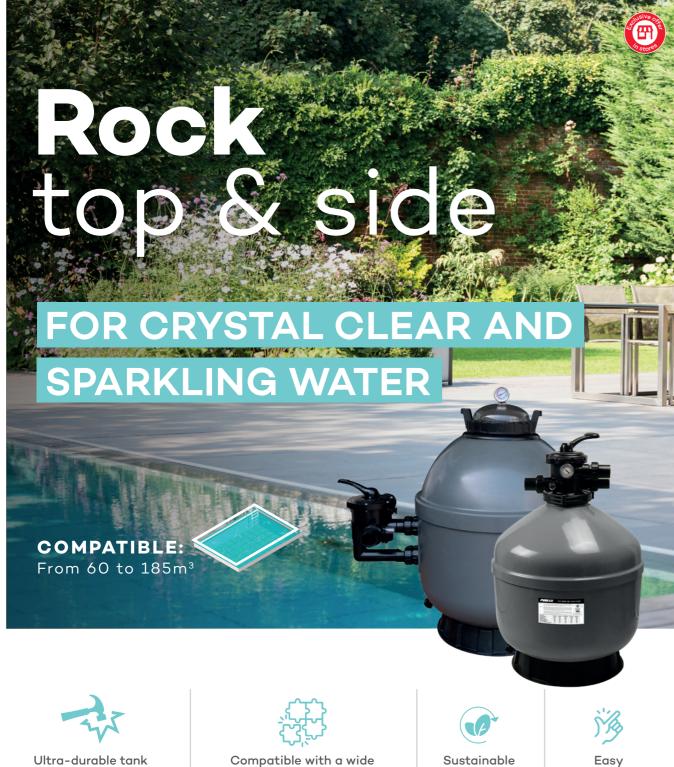

fibre-reinforced polyester + gelcoat



range of filtration pumps

materials

to use

Rock Top & Rock Side filters provide excellent filtration with a **robust** laminate construction that is pressure resistant and durable. Designed for **easymaintenance** with simple cleaning and replacement of filter components. They are compatible with a variety of pumps and can be easily integrated into different filtration systems.

WARRANTIES

• 10 years: tank • 3 years: valve (excluding seals, domes and pressure gauges)



Worm drive hose clamp





Reservoir materials Glass fibre reinforced laminate

Max. operating pressure 36 psi / 2.5 bar

FEATURES ROCK TOP

ROCK TOP	TOP 500	TOP 650	TOP 750			
Product codes	PF-RCK500T	PF-RCK650T	PF-RCK750T			
Maximum flow rate (m³/h)	10	16.5	22			
Diameter (mm)	Ø 500	Ø 650	Ø 750			
Filtration area (m²)	0.20	0.33	0.44			
Volume of water filtered (m ³) (based on an average filtration time of 6 hours)	60	95	125			
Input/Output connections	1.5" /	50mm	2.0" / 63mm			
Dimensions in mm (AxBxC)	886 x 750 x 693	998 x 862 x 805	1159 x 1029 x 945			
Dimensions in mm (DxExF)	286 x 390 x 500	318 x 500 x 650	251 x 500 x 750			
Sand (kg) / Glass (kg)	88 / 70	158 / 125	260 / 210			
Warranty	Filter tank: 10 years / Valve: 3 years					


FEATURES ROCK SIDE


ROCK SIDE	SIDE 500	SIDE 650	SIDE 750	SIDE 900		
Product codes	PF-RCK500S	PF-RCK650S	PF-RCK750S	PF-RCK900S		
Maximum flow rate (m³/h)	10	16.5	22.1	31.8		
Diameter (mm)	Ø 500	Ø 650	Ø 750	Ø 900		
Filtration area (m²)	0.20	0.33	0.44	0.64		
Volume filtered (m ³ in approximately 6h)	60	95	125	185		
Input/Output connections	1.5" /	50mm	2.0" /	63mm		
Dimensions in mm (AxBxC)	424 x 487 x 845	472 x 535 x 943	517 × 603 × 1015	583 x 669 x 1165		
Dimensions in mm (DxExF)	360 x 516 x 390	380 x 666 x 390	440 x 770 x 500	480 x 920 x 780		
Sand (kg) / Glass (kg)	100 / 70	185 / 150	265 / 215	405 / 325		
Warranty	Filter tank: 10 years / Valve: 3 years					



6-way valve made of robust ABS plastic and stainless steel.









GET CRYSTAL CLEAR WATER EFFORTLESSLY







Compatible with a wide range of filtration pumps



Ultra Top & Ultra Side sand filters, resistant to high pressures, guarantee remarkable durability in the most demanding environments. Their ease of maintenance reduces downtime and they can be easily integrated into a range of pumps, optimising energy efficiency. Designed for residential and public pools, they provide exceptional filtration, longer service life and are extremely

WARRANTIES

• 10 years: tank • 3 years: valve (excluding seals, domes and pressure gauges)

Easy

to use



Worm drive hose clamp





HDPE (High-density polyethylene)

Max. operating pressure 40 psi / 2.8 bar

FEATURES ULTRA TOP

ULTRA TOP	TOP 20	TOP 24	
Product codes	PF-ULT500T	PF-ULT600T	
Maximum flow rate (m³/h)	10	14	
Diameter (mm)	Ø 500	Ø 600	
Filtration area (m²)	0.20	0.28	
Volume of water filtered (m ³) (based on an average filtration time of 6 hours)	60	80	
Input/Output connections	1.5" /	50mm	
Dimensions in mm (AxBxC)	889 x 772 x 712	980 x 860 x 800	
Sand (kg) / Glass (kg)	70 / 55	125 / 100	
Warranty		years / Valve: 3 ars	


FEATURES ULTRA SIDE


ULTRA SIDE	SIDE 20	SIDE 24	SIDE 27	SIDE 31	SIDE 35	
Product codes	PF-ULT500S	PF-ULT600S	PF-ULT675S	PF-ULT775S	PF-ULT875S	
Maximum flow rate (m³/h)	10	14	18	23.5	30.5	
Diameter (mm)	Ø 500	Ø 600	Ø 675	Ø 775	Ø 875	
Filtration area (m²)	0.20	0.28	0.36	0.47	0.61	
Volume filtered (m ³ in approximately 6h)	60	80	105	140	180	
Input/Output connections	1.5" /	1.5" / 50mm		2.0" / 63mm		
Dimensions in mm (AxBxC)	396 x 549 x 760	430 x 493 x 825	460 x 546 x 946	508 x 594 x 968	564 x 650 x 1086	
Dimensions in mm (DxExF)	225 x 500 x 125	280 x 600 x 125	300 x 675 x 130	370 x 775 x 130	440 x 875 x 130	
Sand (kg) / Glass (kg)	70 / 55	125 / 100	185 / 150	320 / 255	430 / 345	
Warranty		Filter to	ank: 10 years / Valve	: 3 years		

easy to maintain.



6-way valve made of robust ABS plastic and stainless steel.







Optiball 700g THE ECO-CONSCIOUS CHOICE: **UNIVERSAL FILTER BALLS**



More environmentally friendly

Optiball is the ideal solution for keeping water

healthy and clean while reducing costs and environmental impact. These filters effectively remove organic contaminants and suspended

particles. Washable and environmentally friendly, they provide high quality filtration while reducing

PF-OPTIBALL700C

Filtration down to 3µm

the carbon footprint of pool maintenance.

700 g



down to 3µm

100% recyclable polyethylene

Š/A Easy to use

SAND FILTER COMPATIBLE



Choose an ultra-lightweight unit that is easy to handle and move around. It can be hosed clean with cold water or machine washed in a bag 30°C without detergent.





Choose an ultralightweight unit that is easy to handle and move around. It can be hosed clean with cold water or machine washed in a bag 30°C without detergent.

PUREFLOW

HIGH PERFORMANCE POLYMER FILTER



Product code

Filter fineness

Quantity

OPTIMAX 100G BALL CARTRIDGE



More environmentally friendly



down to 3µm



100% recyclable polyethylene

Discover the power of pure water with Optimax. Equipped with a reusable and eco-friendly mesh, this cartridge contains a filter media impregnated with activated charcoal for exceptional water clarity. Its long life offers reliable and affordable filtration, in addition to easy installation which makes it accessible for everyone.

Ball cartridges replace type A filter cartridges (\emptyset 10.5 cm & height 20 cm)

Product code	PF-OPTIMAXC
Quantity	100 g
Filter fineness	Filtration down to 3µm
Compatibility	Type A cartridge



No pressure increase due to filtering



The perfect solution for replacing filtration sand

This polymer fibre-based filter media favourably replaces the sand filter sand, glass or zeolite. Ultralight, 500 g of PureFlow replaces 36 kg of sand! Filters down to 10 µm, does not create a biofilm, and reduces backwashing and pressure in the filter.

POOLEX

Quick reminder about salt chlorinators

Salt water chlorination is the conversion of sodium chloride (salt) dissolved in the water into sodium hypochlorite (active chlorine), a natural disinfectant present in salt water. When electric current is passed through salt water, it leads to the dissociation of salt molecules into chlorine ions and sodium ions, which then react to form sodium hypochlorite.



BENEFITS



Gentle on skin and eyes



Easy pool maintenance



No need to handle chemicals

Θ

Eliminates the excess of chlorine and stabiliser from tablets

GOOD PRACTICES TO KEEP YOUR WATER CRYSTAL CLEAR

Correct dosage of salt

This is the key to good salt water chlorination. The proper dosage of salt optimises the disinfection of your pool and extends the life of electrodes.

Check your pH

The sodium hypochlorite created during chlorination naturally increases the pH. It is therefore essential to regularly test the water or install an automatic pH regulator.

Stabiliser

If the amount of stabiliser is too low, the sodium hypochlorite will revert to salt before it can disinfect, and if the stabiliser is too high, the hypochlorite will stop working. It's therefore important to have the right levels. It varies very little throughout the season.

Wintering

Below 10°C, salt chlorination is no longer effective, and it's time to winterize your chlorinator. Remove the cell, clean if needed and store it for the next season.

The right time:

Water less than 10°

	AQUALYSER			SEL'IN				
Versions	Total	Flex	20	30	50	75	90	120
Production (g/h)	Adjustable: 4 / 8	/ 12 / 16 / 20g/h	4	6	10	15	20	30
Pool volume	Up to	80 m³	20	30	50	75	90	120
Swimming pool type	In-grou	nd pool	ln-gr	ound po	ool (& al	bove-gr	ound op	otion)
Salinity	2.7 to 4	+ ppm			2.7 to	4 ppm		
Modes	4 modes: ORP / p Mar			odes: C Summei	-		-	
Min/max flow rate (m³/h)	6 -	10			2 -	10		
Connection	D 50 mm for sol	D 50 mm and 32/38 mm						
Covered mode	Self-regulated I	Manual						
Self-cleaning	Program	Automatic & programmable						
Alarms	Error (sound co	Salt level / Flow rate						
Cell orientation	Horiz	ontal	Horizontal or vertical					
Sensors included	pH and	Redox	No					
Built-in analysis chamber	$\overline{\mathbf{G}}$	\overline{O}	No					
Cell type		Ruthenium c	oated t	itanium				
Cell service life	10,000	10,000 hours						
Built-in flow sensor	\bigcirc			\bigcirc				
Warranty	5 years (housing + cell)			5 years (housing + cell)				
Connectivity	WiFi (Cloud / OTA / App)			No				
Pool-earth	Inclu	Included						

Between 3000 & 4000ppn

een 7 and 7.4





Compatible with pools up to 80 m³

pH sensors + ORP

WiFi. Cloud & OTA

Integrated lighting



This precise system ensures that the water remains healthy and clear, with easy and efficient management. Equipped with a **redox probe**, it constantly checks the level of disinfectant and **automatically adjusts** the production of gaseous chlorine according to the actual needs of the pool. A pH probe **monitors the pH of the water** and **regulates** the pump to ensure a perfect balance. Its "Total" version is the 1st compact salt chlorinator and pool equipment controller, a true all-in-one.

WARRANTY

• 5 years: case + cell (10,000h) excludes consumable parts





POOLEX

history

water

Lighting integrated in the case for the

Versions	TOTAL FLEX				
Product code	CL-AQUALYSR-TL1	CL-AQUALYSR-FX1			
Pool volume (m ³)	< 80 m³				
Chlorine production		2 0g/hr 12, 16 & 20 g/h)			
pH- pump flow rate	0.2I/	/min			
Max. power/standby	150W	/ 5W			
Connection	D50mm for solv	vent cementing			
Reverse polarity	Yes, adjustable: 4/6 or 8h				
Salinity	From 2.7 to 4 ppm (optimal 3 ppm)				
Probes & sensors	REDOX, pH, temp. & flow rate				
Modes	ORP / Timer / Manual / pH minus				
Connectivity	WiFi – Po	oolex APP			
Control filter pump relay	Yes (dry	contact)			
Alarms	Error (sound co	an be disabled)			
History		ameters (ORP, pH, alt, Temp.)			
Pool-Earth	Yes - connect to ground rod (< 20 ohms)				
Analysis chamber	Yes: Separate from main flow for better durability and more accurat measurements				
Warranty	Case 5 years + tit ho	anium cell 10,000 urs			



OTA & CLOUD

OTA (over-the-air) allows the built-in software to be upgraded remotely. Connection to the Cloud provides:

• Technical support:

- Check and change parameters remotely
- Identify errors
- Avoid unnecessary callouts
- Reduce downtime


FLEX VERSION

(modular)

Designed with two separate modules, this version is perfect for conventional pool equipment rooms and offers great flexibility for renovation projects.





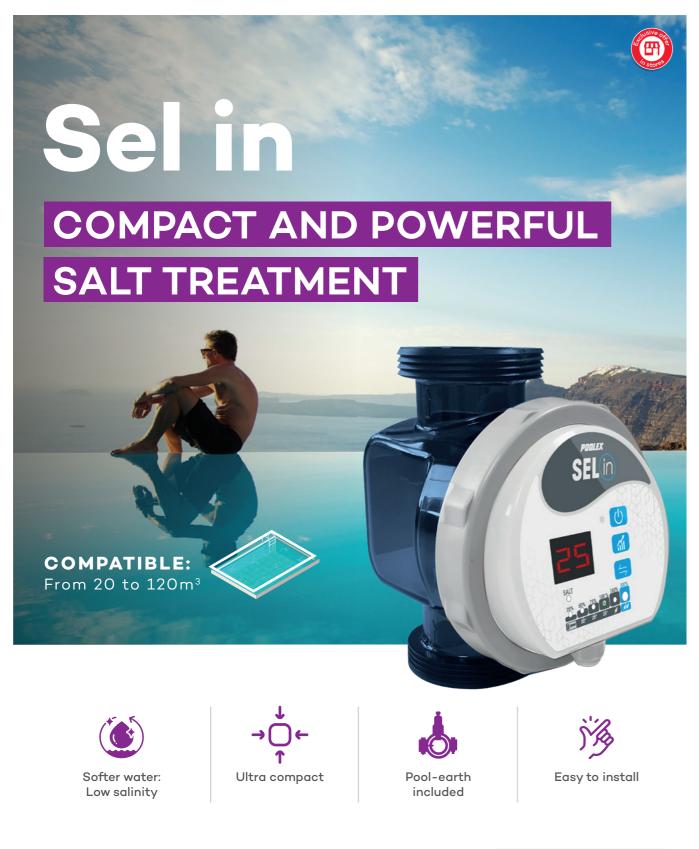

Our latest generation salt chlorionator is designed for confined spaces with integrated electronics in an **ultra-compact cell**. It has coated titanium plates that guarantee 10,000 hours of use, and automatic reverse polarity cleaning. Six modes, including Boost ++, adjust the water temperature for optimum performance.


WARRANTY

• 5 years: case + cell


ELECTROLYSIS CELL

The Sel In electrolysis cell is made of Ruthenium-coated titanium plates.

This surface coating improves the efficiency of the electrolysis reaction and the durability of the plates. What's more, reverse polarity control during chlorine production reduces fouling.



INTUITIVE USE

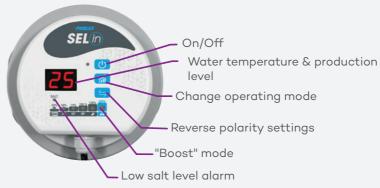

SELIN	SL20	SL30	SL50	SL75	SL90	SL120			
Product code	CL-SL20	CL-SL30	CL-SL50	CL-SL75	CL-SL90	CL-SL120			
Pool volume (m ³)	20	30	50	75	90	120			
Production g/h	4	6	10	15	20	30			
Connection		50 mm for solvent cementing / adaptors 32/38mm							
Salinity		F	rom 2.7 to 4 ppm	n (optimal 3 ppn	n)				
Protection			(P)	Χ4					
Cover detection		Ν	1anual: limits pro	oduction to 20%	6				
Reverse polarity			Yes, adjustal	ole: 4/6 or 8h					
Alarms		High / Iow	v salt level, insuf	ficient water flo	w / Errors				
Cell orientation			Horizontal	or vertical					
Overall housing dimensions (mm)		125 x 160 x 1	45 mm / 125 x 1	60 x 190 mm		150 x 160 x 190 mm			
Cell dimensions with connectors (mm)		Lengtł	n 40 cm with co	nnectors - DN 5	50 mm				
Modes			Automatic / C	overed / Boost					
Accessories	Included: 2 x 32/38 mm connectors (excluding SL120) - 2 x 50 mm connectors for solvent cementing - Winter sleeve - Pipe end cap - Pool-Earth. Optional extras: Adjustable mounting bracket - pH pump.								
Warranty	5 years: case + cell 10,000 h								
Replacement cell for	SEL'IN SL20	SEL'INSL30	SEL'INSL50	SEL'INSL75	SEL'INSL90	SEL'INSL120			
Product code	CL-SL2OL	CL-SL30L	CL-SL50L	CL-SL70L	CL-SL90L	CL-SL120L			





Add a pH pump

For effective treatment with a salt chlorinator, the water balance is essential. particularly the correct pH level. The Poolex pH . Pump, ideal for salt water chlorinators, automatically controls the pH and adjusts

the dosage of pH minus to maintain a constant balance and keep the water healthy and clear.




Product code	PC-PPHMP2
Capacity	Pools up to 65 m³

		•
	SL120	
С	CL-SL120	


WELLINESS OPTIONS

SPA HEATING - INDOOR & OUTDOOR SAUNAS

Poolstar's signature wellness experience

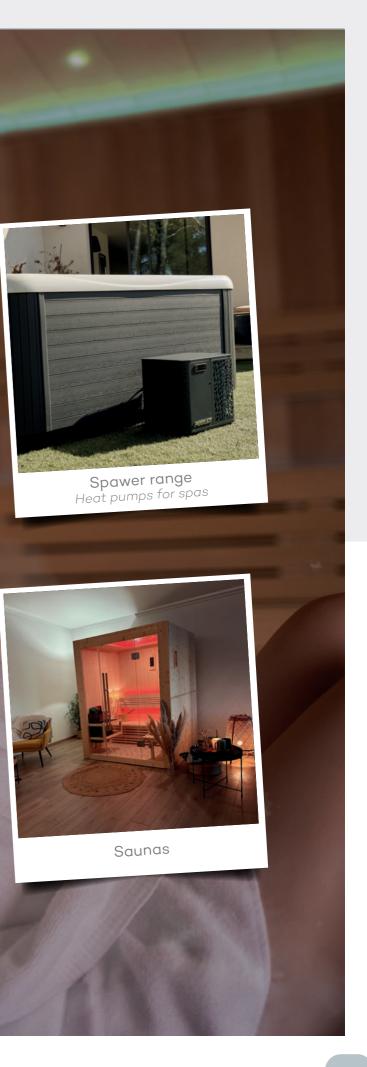



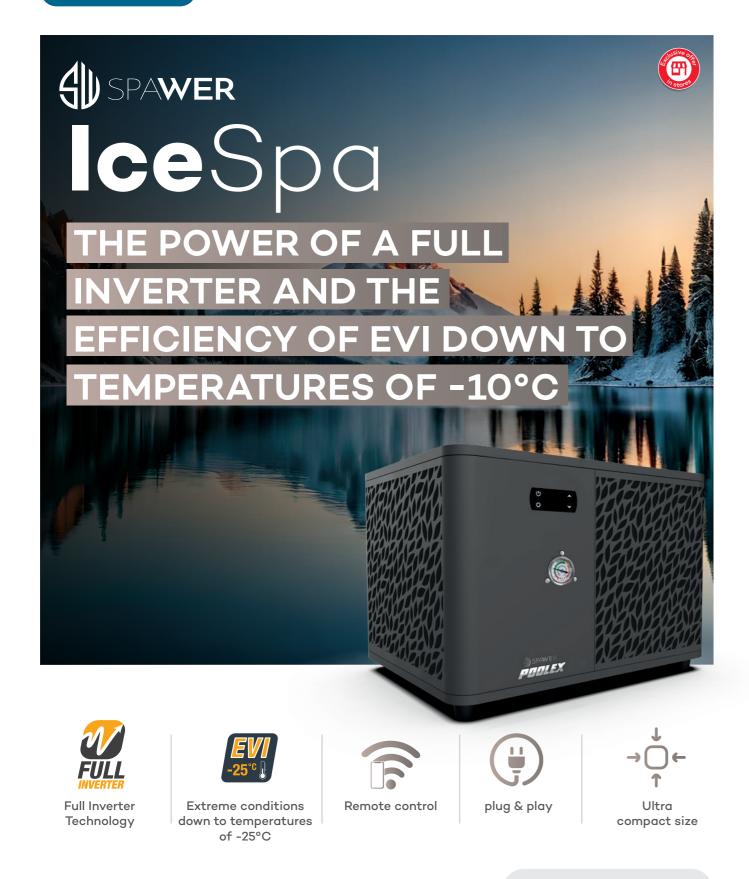

The Spawer IceSpa is a **heat pump for spas**, designed to maintain the temperature of the spa even in extreme weather conditions **down to** -25°C. It can heat the spa while **reducing energy consumption** by up to 75% thanks to Full Inverter technology. Easy to install, it is compatible with all types of spas, swim spas and Scandinavian hot tubs.

WARRANTIES

- 3 years: all components
- •7 years: compressor
- 15 years: titanium coil







		7				
	Product code: PC-ICESPA	70				
Air 26°C	Output power (kW)	3.3 ~ 7				
Water 26°C	Power consumption (kW)	0.28 ~ 1.4				
Humidity 80 %	СОР	5 ~ 11.9				
Air 15°C Water 38°C	Output power (kW)	2.8 ~ 4.7				
	Power consumption (kW)	0.67 ~ 1.3				
Humidity 70 %	СОР	3.7 ~ 4.2				
Air -10°C	Output power (kW)	2.2 ~ 3.3				
Water 38°C	Power consumption (kW)	1.2 ~ 1.5				
Humidity 70 %	СОР	1.8 ~ 2.1				
Air 15°C	Output power (kW)	3.2 ~ 3.7				
Water 26°C	Power consumption (kW)	0.87~1.2				
Humidity 70 %	СОР	3 ~ 3.7				
Power sup	oply	Single-phase 220-240V~50Hz				
Heating temperature range		15 °C ~ 40 °C				
Cooling to	emperature range	4°C ~ 35°C				
Operating range*		-25 °C ~ 43 °C				
Max. outp	out (kW)	1.7				
Flow rate (m³/h)		3				
Refrigerant		R32				
Packaging dimensions (mm)		910 x 550 x 540				
Dimensions (mm)		710 x 490 x 500				
Net / gros	ss weight (kg)	43 / 46				
Noise level at 1 m (db(A))		48				
Noise level at 10 m (db(A))		28				
Compressor		GMCC - Rotary				
Heat exchanger		Twisted Tech© Titanium				
Mode		Heating + Cooling				
Pressure	loss (mH2O)	O.4				
Accessories		Included: Power relay (x2) / RCD plug with 5m cable / Hydraulic connectors (x2) / Hose clamps (x2). Optional extras: Detachable touch screen /				
		Hydraulic connection kit				







Uses less power than a conventional heater










The ultra-**compact** Poolex O'Spa is a spa heat pump that uses up to 75% less energy to heat the spa than traditional electric heaters. The O'Spa can be installed in any type of spa or Scandanavian hot tub and can take control of the existing electric heater to optimise spa heating or when the ambient temperature is too low. The integrated chiller function also lets you enjoy an ice bath after an intense workout session, for example.


WARRANTIES

- 2 years: all components
- 5 years: compressor
- 10 years: titanium coil



		3	5	7			
Product code: PC-OSPA		32	50	71			
Air 26°C Water 26°C	Output power (kW)	3	5	7			
	Power consumption (kW)	0.58	0.97	1.35			
Humidity 80 %	COP	5.15	5.20	5.20			
Air 15°C	Output power (kW)	1.80	3.30	3.96			
Water 38°C	Power consumption (kW)	0.65	1.10	1.34			
Humidity 70 %	СОР	2.77	3	2.95			
Air 35°C	Output power (kW)	1.80	2.35	3			
Water 27°C	Power consumption (kW)	0.80	1.30	1.52			
Humidity 70 %	EER	2.30	1.90	2			
Air 15°C	Output power (kW)	1.57	2	-			
Water 10°C	Power consumption (kW)	0.53	0.75	-			
Humidity 70 % EER		3.00	2.5	-			
Power supply		Single-phase 220-240V~50Hz					
Heating temperature range		10 °C ~ 40 °C					
Cooling temperature range		3°C ~ 28°C					
Operating	g range*						
Max. outp	out (kW)	0.7	1.35	2			
Flow (m ³ /h)		1.3	2.16	2.16			
Refrigerant							
Packagin	g dimensions (mm)	470 x 40	657 x 460 x 490				
Dimensions (mm)		440 x 350 x 430		600 x 430 x 430			
Net / gro	ss weight (kg)	26 / 28	32 / 35	30 / 35			
Noise lev	el at 1 m (db(A))	< 50	< 53	< 50			
Noise level at 10 m (db(A))		< 30 < 32		< 30			
Compressor		GMCC - Rotary					
Heat exchanger		Twisted Tech© Titanium Heating + Cooling (chiller)					
Mode							
Pressure	loss (mH2O)	1.2	1.2	1.2			
Accessor	ries	Included: Power relay / RCD plug with 5m cable / Hydraulic connectors (x2) / Hose clamps (x2). Optional extras : Detachable touch screen / Hydraulic connection kit / Circulation pump relay					







EVER By-Pass kit 50m For connecting a HEAT PUMP TO YOUR SPA

INCLUDED IN THIS KIT

A 1 valves with 2 union fittings Ø 50 mm

B 2 reducing tee fittings Ø 50/32 mm

©2 reducing sleeve connectors for pipe Ø 48/ Ø 50 mm

■ 4 x 1m flexible PVC pipe Ø 32 mm

■ 2 valves with 2 union fittings Ø 32 mm

E Flexible PVC glue + stripper

G 4 sleeves for solvent cemening Ø 32 mm

🖪 2 threaded fittings Ø 32 mm/1

2 threaded union fittings Ø 32 mm

■ 1 roll of Teflon tape

ASSEMBLY OPTIONS



This Poolex By-Pass kit allows you to connect your Spawer heat pump to your spa's filtration system, regardless of the type of 48/50mm filtration system.



NOT INCLUDED

Flexible or rigid pipe for solvent cementing Ø50mm

Product code

SP-HLKITBYPASS

OTHER ACCESSORIES



Auxiliary relay

Thanks to this relay, your heat pump can control an auxiliary circulation pump, making everything completely autonomous, or it can even be used to heat the spa.

Product code

PC-SWRELAY1





Detachable touch screen

You can connect this detachable screen to your Spawer to control it remotely thanks to a 10 m cable. Included with the IceSpa, it comes as an optional extra for the O'Spa

Product code Cable length PC-SWSCREEN 10 metres



OUR SAUNAS

THE ESSENCE OF WELLBEING AT HOME

The world of saunas is undergoing a revolution and is quickly becoming an essential part of home wellness. Through its Holl's brand, Poolstar offers solutions that are in tune with real needs, combining energy efficiency with authenticity.

Our compact and fully insulated models reduce energy consumption and the wood burning heater provides a traditional and immersive experience. For even more customisation, our catalogue is full of accessories and COMBI heaters that allow you to tailor the experience with higher humidity.

We all offer an optional on-site assembly service and some models are delivered pre-assembled.





STEAM Traditional wellbeing


INFRARED A gentle heat for regular use

The enveloping heat of the steam sauna is the ideal way to relax and regenerate your body.

Its benefits include reducing stress, stimulating blood flow and improving skin quality.

Infrared technology is an ideal alternative for sports enthusiasts, seniors and people looking for quick relaxation.

Thanks to the Full Spectrum + Magnesium heaters and Triple Care technology, our infrared saunas offer an enveloping heat for optimum wellbeing.

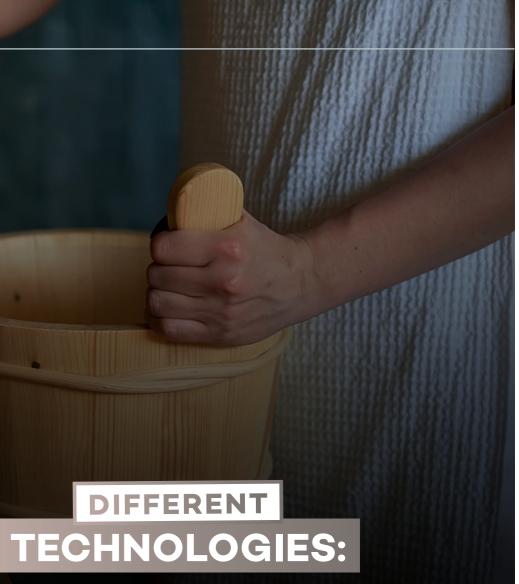







HYBRID

Tailored heating for all your needs

Hybrid technology combines the benefits of infrared heat and traditional heaters to create a personalised sauna experience.

Ideal for users looking for flexibility, you can now enjoy the best of both heating methods.

H HOLL'S



	υτορια			ECCOLO		
	3	4	6	3	6	
Technology		Steam		Ste	eam	
Seated / reclined capacity	3 5	4 4 / 2 🛰	ձ՝ / 3 🛰	2 	6 Կ/ 3 🛰	
Dual Healthy heaters	-	-	-	-	-	
Carbon panels	-	-	-	-	-	
Power output (kW)	4.5	6	8	3.5	4.5	
Included: Harvia stove (kW)	4.5	6	8	3.5	4.5	
Lighting		\odot		(Ø	
Chromotherapy		\bigcirc		(\supset	
Audio		MP3 / Bluetooth			-	
Control panel		Touch screen			_	
Wood		Hemlock & abachi		Red ceda	r & spruce	
Warranties Electronics / Wood	2 / 10 years 2 / 10 years				years	
Assembly (no. of people)	2	3	3	2	2	
					imption thanks to	

Benefits of Holl's

Starry sky ceiling lights Spacious bench: 55cm in depth Two-tiered bench (6 person)

Low energy consumption thanks to reinforced insulation Raised bench (2 person) Two-tiered bench (6 person)

5 INFRARED 0 NOL **H**O Π



		30	0	2	3	30	Z	4
Technology	Infrared Quartz + Magnesium + Carbon			Infrared Quartz + Magnesium			Steam & Infrared Quartz + Magnesium	
Seated / reclined capa- city	2 	3/4 ็	6 ኁ / 2 🛰	2 	3 5	3/4 ኁ	2 'n	4 ५/2 🛰
Dual Healthy heaters	2	4	7	5	6	7	6	8
Carbon panels	5	6	8	1	1	1	1	1
Power output (kW)	2.15	3.25	4	2.25	2.6	2.6	2.2	2.9
Included: Harvia stove (kW)	-	-	-	-	-	-	3.5	4.5
Lighting	\odot		-			\bigcirc		
Chromotherapy	\bigcirc			\odot			\odot	
Audio	MP3 / Bluetooth / Resonance spea- kers			MP3 / FM / Bluetooth			MP3 / FM / Bluetooth	
Control panel	Digital touch screen			Digital touch screen			Digital touch screen	
Wood	Spruce & abachi			Spruce & abachi			Red cedar & spruce	
Warranties Electronics / Wood	2 / 10 years			2 / 10 years			2 / 10 years	
Assembly (no. of people)	2	3	3	2	2	3	3	3


Benefits of Holl's

Unique infrared technology Large glazed surfaces

Fully equipped and functional

Steam & infrared dual technology



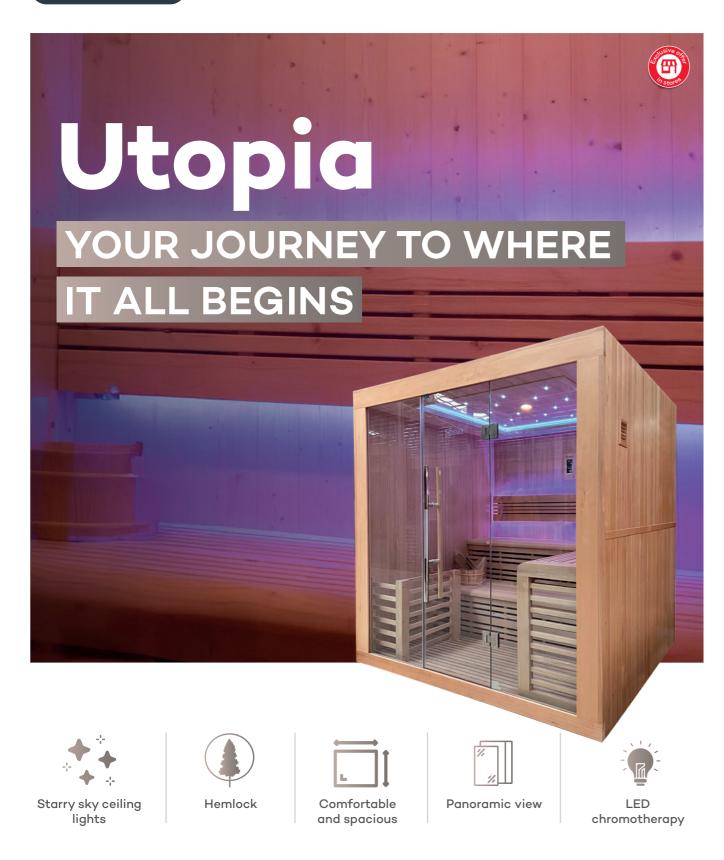

A true interlude of wellness The heat of a **traditional sauna**, the scent of solid wood and the large glass windows and doors invite you to escape. Utopia is a haven of tranquillity, a journey at your leisure. Water poured over the hot stones releases a gentle steam, a prelude to total relaxation. Muscles relax and stress disappears under the effect of heat. With a calmer mind and more relaxed body, circulation improves and the heart regains its rhythm.

WARRANTIES

- 2 years: electronics
- 10 years: wood



Spacious abachi benches with a depth of 55 cm

FEATURES



NEW	ARRIVALS		
	2025 UTOPIA 3	UTOPIA 4	UTOPIA 6
	HL-UTA03PK	HL-UTA04PK	HL-UTA06PK
	3 persons	4 persons	6 person
	155 x 145 x 196 cm	200 x 145 x 196 cm	200 x 183 x 210 cm
	Harvia Vega 4.5 kW sauna heater included	Harvia 6 kW Vega stove included	Harvia 8 kW Vega stove included
	LEDs mounted overhead and under the bench provide bright illumination and chromotherapy		
Interior lighting and starry sky effect ceiling		ng	
	Outer panels made of Hemlock wood Abachi bench and headrest Digital touch screen for MP3 and Bluetooth audio		
			audio
Sauna kit included			



Sauna kit included Bucket / Ladle / Hourglass / Thermometer / Hygrometer

Large glazed surface for a sense of freedom





This sauna is available in two sizes: 2 or 6 persons, with optimised insulation for significant energy savings. Its insulated walls, enclosed space under the benches and specially designed door minimise heat loss. For the 2-person sauna, a 3.5 kW heater is sufficient, while the 6-person version only needs a 4.5 kW heater thanks to its highperformance insulation.

WARRANTIES

- 2 years: electronics
- 10 years: wood





chromotherapy

Red cedar & spruce

FEATURES



ECCOLO 3 HL-EC03-K 2 person

150 x 130 x 190cm

Harvia Vega 3.5 kW sauna heater included

Interior LED chromotherapy

Red cedar and spruce

Double bench and headrests made of abachi wood


Mineral wool insulation + vapour barrier

Sauna kit included





Sauna kit included Bucket / Ladle / Hourglass / Thermometer / Hygrometer



ECCOLO 6

6 person

200 x 175 x 190 cm

Harvia Vega 4.5 kW sauna heater included
















LED

Exceptional design and thoughtful finishes to create a complete retreat. Holl's designed this new range of infrared cabins to help you relax and unwind after a long day. With "Triple Care" technology, enjoy short and long infrared waves to Reset & Restore. Carbon heaters release a soothing heat, while quartz or magnesium heaters target muscular relaxation or detoxification. Bespoke moments of wellbeing for you and your family.

WARRANTIES

• 2 years: electronics

• 10 years: wood

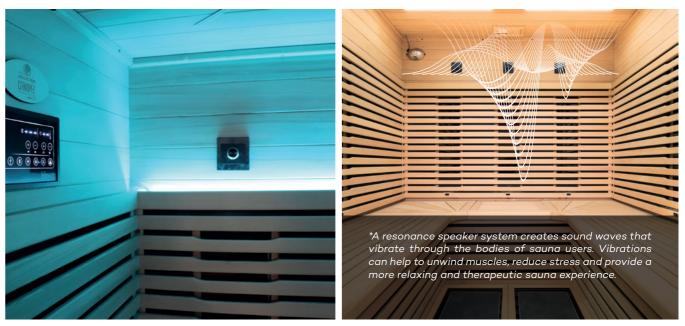

LED chromotherapy and potentiometer







Ioniser for air purification

Bench & headrest made of abachi wood

FEATURES





CANOPÉE 2	CANOPÉE 3C	CANOPÉE 6
HL-CNP02	HL-CNP03C	HL-CNP06
2 person	3/4 person	6 person
140 x 125 x 190 cm	160 x 160 x 190 cm	185 x 185 x 190 cm
2 Dual Healthy infrared heaters	4 Dual Healthy infrared heaters	7 Dual Healthy infrared heaters
5 carbon panels	6 carbon panels	8 carbon panels
5 carbon panels 2150 W heating power	6 carbon panels 3250 W heating power	8 carbon panels 4000 W heating power
-	•	•
2150 W heating power	3250 W heating power	4000 W heating power
2150 W heating power	3250 W heating power LED chromotherapy	4000 W heating power


Abachi bench and headrest

Resonance speaker*



Touch screen control panel + audio player



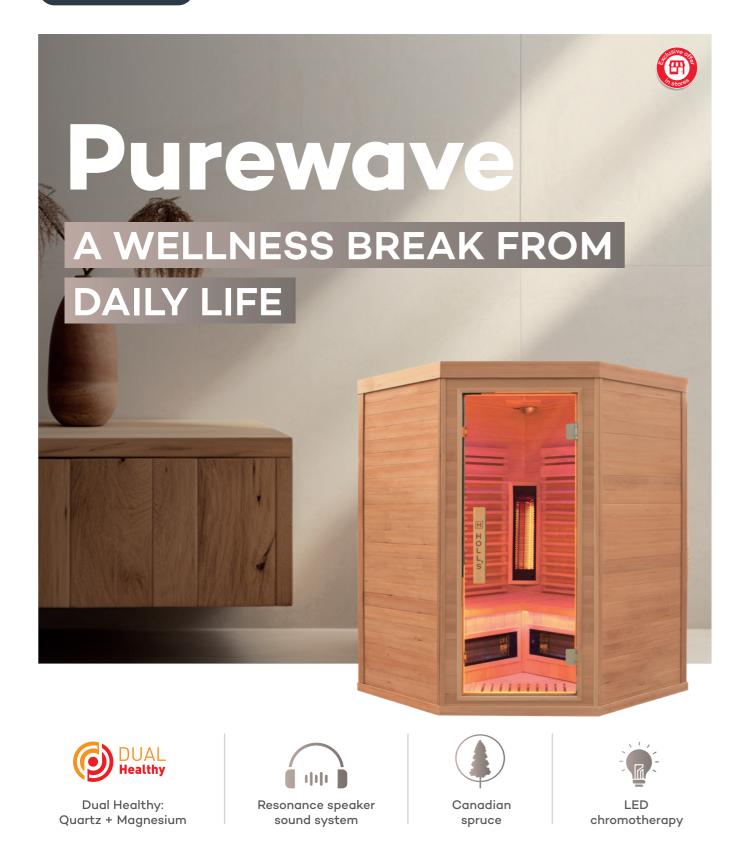

Set up and control each session with ease: music, quartz or magnesium infrared mode, chromotherapy, all designed for optimal comfort. This white spruce infrared cabin from Holl's has an ultra-modern design that is a great addition to any space. Equipped with Full Spectrum Quartz/Magnesium dual technology for gentle treatment and deep relief. The Dual Healthy panels and exceptional features are the perfect choice for incorporating wellness and aesthetics into your daily life.

WARRANTIES

• 2 years: electronics • 10 years: wood

Bench & headrest made of abachi wood



Exterior made of **Canadian spruce**

FEATURES



PUREWAVE 2	PUREWAVE 3	PUREWAVE 3C
HL-PUR02	HL-PUR03	HL-PUR03C
2 person	3 persons	3/4 person
130 x 110 x 190 cm	150 x 110 x 190 cm	140 x 140 x 190 cm
5 infrared heaters	6 infrared heaters	7 infrared heaters
2250 W heating power	2600 W heating power	2600 W heating power
LED chromotherapy		
Digital control panel & MP3 / FM / Bluetooth Audio with resonance speaker		

Exterior made of Canadian spruce

Abachi bench and headrest





Touch screen control panel + audio player






7-colour LED chromotherapy

High fidelity audio with resonance speaker*



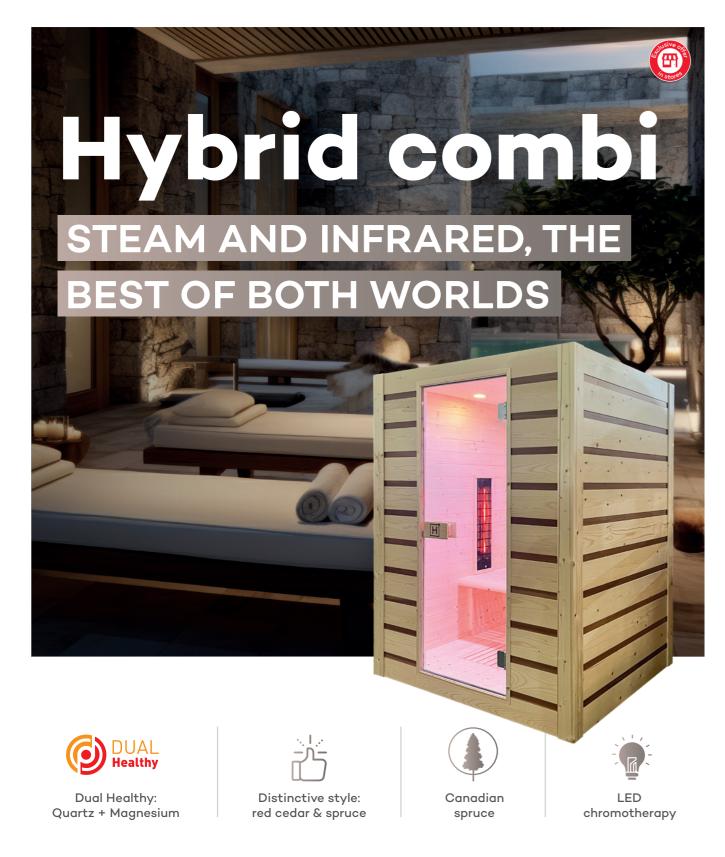

Choosing between the joys of a **traditional sauna** and the benefits of infrared waves is hard. That's why we've created a cabin that combines these two sauna designs! The Hybrid Combi is revolutionising the world of saunas, offering steam or infrared sessions with quartz and magnesium waves in the same cabin. Dual Healthy Quartz + Magnesium heaters are ideally placed to provide **maximum benefit**.

WARRANTIES

• 2 years: electronics • 10 years: wood

HYBRID TECHNOLOGY

A hybrid sauna combines the intense heat of an electric heater with the gentleness of infrared, offering a customised experience, tailored to each individual's preferences and needs, while maximising the benefits for **circulation**, **relaxation** and **muscle recovery**.



FEATURES



HYBRID COMBI 2

HL-HC02PK

2 person

140 x 130 x 190 cm

2200 W: 6 Quartz + Magnesium heaters (350W) + 1 carbon panel (100W)

3.5 kW heater

Red cedar and spruce

Abachi bench and headrests

Sauna kit included



Bench & headrest made of abachi wood



HYBRID COMBI 4

HL-HC04PK

4 persons

180 x 140 x 190 cm

2900 W : 8 Quartz + Magnesium heaters (350W) + 1 carbon panel (100W)

4.5 kW heater

Interior LED chromotherapy





	GAÏA NOVA	GAÏA LUNA	GAÏA BELLA
Technology	Steam	Steam	Steam
Seated / reclined capacity	6 🔓 / 3 🛰	6 ኁ / 3 🛰	3 🔓 / 1 🛰
Recommend power of electric heater (kW)	6-8 (not included)	6-8 (not included)	4.5-6 (not included)
Rear window	-	-	-
Compatible with wood burning heater	\odot	-	-
LED strip lighting	\odot	\bigcirc	\odot
Chromotherapy	\odot	\bigcirc	\odot
Audio	-	-	-
Wood	Spruce	Spruce	Spruce
Warranties Electronics / Wood	2 / 4 years	2 / 4 years	2 / 4 years
Assembly (recommend no. of persons)	3	3	3
	Comfortable and adjustable	Outdoor terrace	Compact size
Benefits of Holl's	Comfortable and adjustable bench Two-tiered bench	Comfortable and adjustable bench	Comfortable and adjustabl bench
		Two-tiered bench	Two-tiered bench



ONYXIA CUBE

Technology	Steam	
Seated / reclined capacity	4 5/1 🛰	
Recommended heater power (kW)	from 4.5 (not included)	
Rear window	Optional extra	
Compatible with wood bur- ning heater	-	
LED strip lighting	\odot	
Chromotherapy	-	
Audio	-	
Wood	Pine ThermoWood®	
Warranties Electronics / Wood	2 / 4 years	
Assembly (recommend no. of persons)	4	
Benefits of Holl's	Sustainable high-quality wood with low carbon footprint Contemporary and modern design Front and rear half-moon window options available	

ONYXIA BARREL

Steam

6 4/2 🛰 from 6 (not included)



 \oslash

_

Pine ThermoWood®

2 / 4 years

4

Sustainable high-quality wood with low carbon footprint Contemporary and modern design Rear half-moon window





The Gaïa Nova outdoor sauna has all the features of the **top-of-therange cabin** and its square shape gives it a **spacious feel**. Designed for **6 people**, you can enjoy a true **Finnish sauna experience** with its **two-tiered bench**. The upper bench is designed with comfort in mind, with a backrest and **folding recliner**, as well as a **removable headrest**. To complete the interior ambience, the cabin is equipped with a set of LED lights in 7 different colours, allowing you to enjoy the benefits of **chromotherapy**.

WARRANTIES

- 2 ans: electronics
- 4 years: wood



Comfortable folding recliner & 7-colour LED chromotherapy





Heater positioned for optimum comfort

FEATURES

HL-B200E
6 persons seated or 3 reclined
Dimensions 205 x 205 x 220 cm
LED chromotherapy
Canadian Spruce
Wall thickness: 38 mm
Three-person, double height bench
Retractable upper bench + removable headrest
Bucket, ladle, hourglass, thermometer, hygrometer included
Bench and headrest made of FSC-certified Canadian
spruce

Recommended heater 6 to 8 kW (not included)








Comfortable headrest




Wooden entrance step and exterior cladding included



(4) Wellness



Gaïa Luna IN THE PUREST FINNISH TRADITION



Adjustable upper bench



tradition



Canadian spruce



Made of solid spruce, this outdoor sauna offers a **fold-away bench** for reclining and resting your head. Adjust the lighting using the **remote** control and enjoy all the benefits of chromotherapy. The Gaïa Luna can seat up to 6 people and its curved design optimises air flow and heat circulation for **optimum comfort**. The two-seater terrace adds a cosy touch, perfect for enjoying a drink while taking in the surrounding scenery.

WARRANTIES

- 2 ans: electronics
- 4 years: wood



Comfortable folding recliner & 7-colour LED chromotherapy





Heater positioned for optimum comfort

FEATURES

HL-T250E
6 persons seated or 3 reclined
Dimensions 250 x 205 x 220 cm
LED chromotherapy
Canadian Spruce
Wall thickness: 38 mm
Two-tiered bench
Multi-positions upper bench
Bucket, ladle, hourglass, thermometer, hygrometer
Bench and headrest made from FSC-certified Canadian spruce


Recommended heater from 6 to 8 kW (not included)




Double bench



Wooden entrance step and exterior cladding included





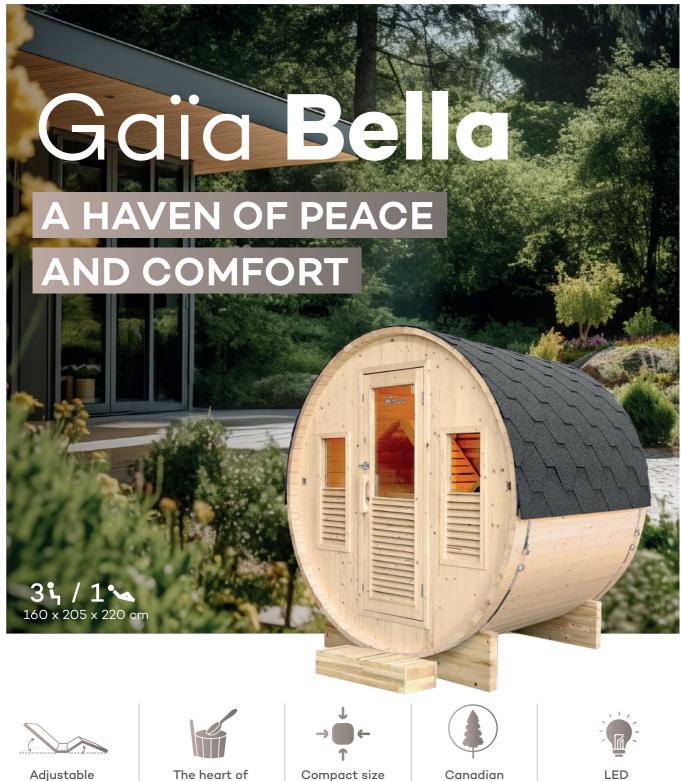

Comfortable folding recliner & 7-colour LED chromotherapy





Heater positioned for optimum comfort

FEATURES

HL-T160E
3 persons seated or 1 reclined
Dimensions 160 x 205 x 220 cm
LED chromotherapy
Canadian Spruce
Wall thickness: 38 mm
Two-tiered bench
Multi-positions upper bench
Bucket, ladle, hourglass, thermometer, hygrometer included
Bench and headrest made of FSC-certified Canadian spruce

Recommended stove 4.5 to 8 kW (not included)

Adjustable upper bench



Canadian spruce



Relaxation for two in the comfort of the Gaïa Bella. Special lighting enhances the benefits of chromotherapy. The white spruce cabin has a Scandinavian design and features two double-tier benches, with the upper bench folding away and fitted with an integrated headrest. Ultra compact and elegant, this outdoor sauna will seduce you with its rounded shape and louvred windows will add a touch of character to your garden.

WARRANTIES


- 2 ans: electronics
- 4 years: wood



Double bench



Glazed façade and louvered wooden shutters











ThermoWood®



Made in Europe







\\|//

The Onyxia Cube is a **spacious and elegant sauna**, designed to seat up to **4 people**. Its **contemporary design** combines **sustainable materials** and intense heat for immersive **relaxation** and **revitalisation**. It offers exceptional durability thanks to ThermoWood® technology. Its large bay window allows you to enjoy the scenery in complete privacy, creating a true haven of tranquillity. **Made in Europe**, it is the **perfect** combination of modernity, comfort and authenticity.

WARRANTIES

- 2 ans: electronics
- 4 years: wood



Bench & headrest made of abachi wood



Spacious bench

FEATURES

HL-SSBLK160

4 persons seated or 2 reclined

Dimensions 160 x 210 x 220 cm

LED wall lighting

ThermoWood[®] heat-treated pine: longer lasting, more environmentally friendly, less maintenance

Waterproof black exterior paint

Two-tiered bench

Door made of 8mm tempered glass

1 protective floor mat included

Recommended heater from 4.5 kW (not included)

Personalisation

Front facade



Rear facade










Panoramic view



< (1)



Sauna not available in the United Kingdom and the Netherlands.







ThermoWood®

Made in Europe



Europe C



The Onyxia Barrel is an outdoor sauna that **blends tradition with modernity**, ideal for an authentic and immersive experience. **Constructed from heat-treated ThermoWood® for exceptional durability**, it features an elegant black finish and a **half-moon window** for panoramic views. Its **spacious** interior includes two full-depth benches, perfect for moments of relaxation. Tailored to your desires, it can be fitted with an electric or wood burning heater.




6 people seated or 2 reclined

WARRANTIES

2 opposite

benches

- 2 ans: electronics
- 4 years: wood

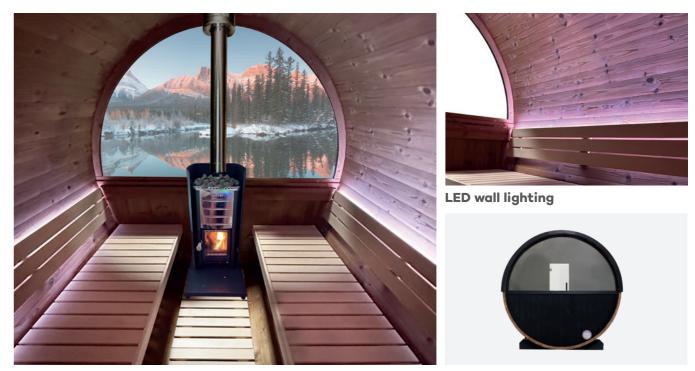

2 benches facing each other

THERMOWOOD®



Increased durability: Wood is more resistant to mould and insects.



Eco-friendly: No added chemicals, wood from certified forests and 100% recyclable.

FEATURES

HL-ONYXBARREL

6 people seated or 2 reclined

Dimensions 240 x 225 x 226 cm

ThermoWood® heat-treated pine: longer lasting, more environmentally friendly, less maintenance

Waterproof black exterior paint

2 benches facing each other

Door made of 8mm tempered glass

1 protective floor mat included

Recommended heater 6 to 8 kW (not included)


Half-moon rear window




Dimensional stability: Reduces variations due to humidity.



Easy to maintain: No treatment required, it adapts to any climate and takes on a light silver tint over time.



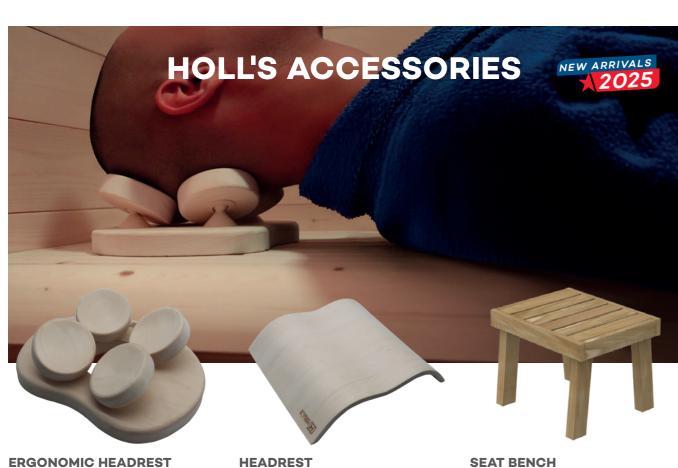

ERGONOMIC HEADREST

HHOLL'S

Ergonomic headrest that perfectly conforms to the shape of your head. Model made from high quality Aspen wood. Compatible with all saunas with room to recline.

code

with room to recline. Dimensions: 18x23cm

Product

HL-HEADREST512A

Product code

Comfortable and durable headrest.

wood. Compatible with all saunas

Model made from high quality cedar

HL-HEADREST515A

Product HL-BENCH520D code

Designed to add an extra space to

your sauna or used as a side table.

Dim. 534 x 430 x 400mm

moisture.

Made from cedar, it resists heat and



WOODEN SAUNA ACCESSORIES STAINLESS STEEL SAUNA KIT

Traditional wooden sauna accessories with 2 sets: bucket (4L) + ladle, and thermometer + hourglass

Bucket + ladle

Thermometer

+ hourglass

Fast	

ACCESSORIES KIT

Traditional sauna kit made of wood and stainless steel consisting of a bucket (5L) and ladle.

HL-ACCBOIS	Bucket + ladle	HL-ACCINOX
HL-KITSANDTHERM	Thermometer + hourglass	HL-KITSANDTHERM



ONYXIA SAUNA KIT

Traditional sauna kit made of black wood and stainless steel consisting of 2 sets: bucket (4L) + ladle, and thermometer + hourglass

Bucket + ladle	HL-ACCBLK
Thermometer	

Thermometer HL-KITSANDTHERMBLK + hourglass



COLD SHOWER BUCKET

Cold shower wooden bucket with mounting bracket. Overflow prevention system and 18-litre capacity.

Product code

HL-PAILPINE



INFRARED HEATED BACKREST

Ergonomic backrest with integrated infrared heater, made of high-quality aspen with adjustable headrest.

Perfect for enjoying the benefits of infrared heating wherever you go.

Wall plug included. Connect to any 220V mains socket

Product code

HL-505-A-HOLLS



3 & 5-PEG WOODEN WALL HOOKS

Wooden screw-in hooks, ideal for hanging towels and bathrobes on the way in and out of the sauna or spa.

	3 pegs	5 pegs
Product code	HL-HANGER582	HL-HANGER583



VULKANO HEATERS

Electric heater with contemporary design

	VULKANO MINI COMBI	VULKAN	О СОМВІ	
Туре		Electric stove		
Product code:	HL-NRMC- 36NB-BL	HL-NRNC- 60NB-BL	HL-NRNC- 90NB-BL	
Power	3.5 kW	6 kW	9 kW	
Recommended volume (min max.)	3 - 6 m³	5 - 9 m³	8 - 14 m³	
Power supply	230 V 1P / 400 V 3P			
Dimensions (LxWxH)	345 x 300 x 525 mm 400 x 385 x 610 mm			
Weight (without stones)	7 kg 9 kg 9 k		9 kg	
Max. capacity	10.5 kg	22 kg	22 kg	
Position	Mural			
Control unit (not included)	HL-SAU-B-CF-V2: classic control unit <u>or</u> HL- INC-SET-V2: control unit with remote control			
Warranty	2 years			



HARVIA ACCESSORIES



HELMI ACCESSORY KIT

Harvia Kit made of recycled materials with bucket, ladle and hourglass.

Colour	Terracotta	lvory	Chocolate
Product code	SN-SA010R	SN-SA010V	SN-SA010B



HARVIA LEGEND METAL BASKET

Storage basket for wood with high-end design. Made for outdoor sauna with wood burning heater. High quality metal base and wooden handle.

Product code

ARVIA



SN-SASPO102

WATERPROOF BLUETOOTH SPEAKER

Connect to this speaker for relaxing music.

Waterproof and heat resistant (up to 65 °C) loudspeaker. 1800 mAh battery, ~8h battery life. USB charging (5 V CC / 0.5 A).



SET OF ESSENTIAL OILS

Set of 4 vials of essentials oils (100ml) for sauna & hammam. This box set contains the following fragrances: Finnish sauna, Eucalyptus, Cedar wood and Cherry Blossom.

Product HL-KIT-HUILE1 code



Stainless steel

and hygrometer.

structure

ACCESSORY KIT

Stainless steel bucket and

SN-SA006 SN-SA007

Black

ladle with thermometer

ACCESSORY KIT Harvia plastic kit consisting of bucket and ladle.

Black

SN-SA009



HARVIA STONE

Stones for electric or wood burning heater (20kg)

	Ø 5-10 cm	Ø 10-15 cm
Product code	SN-AC-ROCK	SN-AC3020



REMOTE CONTROL UNIT Available on quotation

Remote control WiFi Product code: SN-HARVIA-CX170WIFI

Control unit Product code: SN-HARVIA-CX110



Vega

Wall black steel

		VEG	A		WAL	L BLACK S	TEEL	GL	wo	GLOW C	ORNER
Туре	Electric stove		Electric stove		Electric stove		Electric stove				
Product code SN-HARVIA-	PO35	PO45*	PO60*	P080*	SW45*	SW60*	SW60*	TRT70	TRT90	TRC70	TRC90
Power	3.5 kW	4.5 kW	6.0 kW	8.0 kW	4.5 kW	6.0 kW	8.0 kW	6.8 kW	9 kW	6.8 kW	9 kW
Recommended volume (min max.)	1 - 4.5 m³	3 - 6 m ³	5 - 8 m³	7 - 12 m³	3 - 6 m ³	5 - 8 m³	7 - 12 m³	6 - 10 m²	10 - 14 m²	6 - 10 m²	8 - 14 m²
Power supply	230 V 1P / 400 V 3P		230 V 1P / 400 V 3P		230 V 1P / 400 V 3P		230 V 1P / 400 V 3P				
Dimensions (LxWxH)	280 x 295 x 505 mm	$1 / 180 \times 310 \times 5/10 \text{ mm}$		430 x 260 x 700 mm		364 x 364	x 1076 mm	330 x 330 x	(1100 mm		
Weight (without stones)	7 kg	11 kg		11 kg	12 kg	14 kg	15	kg	16	kg	
Max. capacity	12 kg	2 kg 20 kg			20 kg		80 kg		50 kg		
Position	Mural			Mural		On the ground		On the ground			
Control panel	Built-in			Built-in		Built-in		Built-in			
Warranty	2 years										

* HARVIA remote control available.

WOOD BURNING HEATER

Exclusively for Gaïa Nova, Onyxia Cube & Onyxia Barrel outdoor saunas.





PROTECTION

WOOD BURNING HEATER

Product code: SN-HARVIA-PROTECM3-WL100

Product code: SN-HARVIA-M3

CHIMNEY + WOOD BURNING HEATER + PROTECTION KIT Product code: SN-HARVIA-M3-KIT









HEATER GUARD Product code: SN-HARVIA-


WL450




EXTRA OPTIONS

1

POOLICAN - FIRE PROTECTION WATER PUMP -SHOWERS - AQUAFITNESS

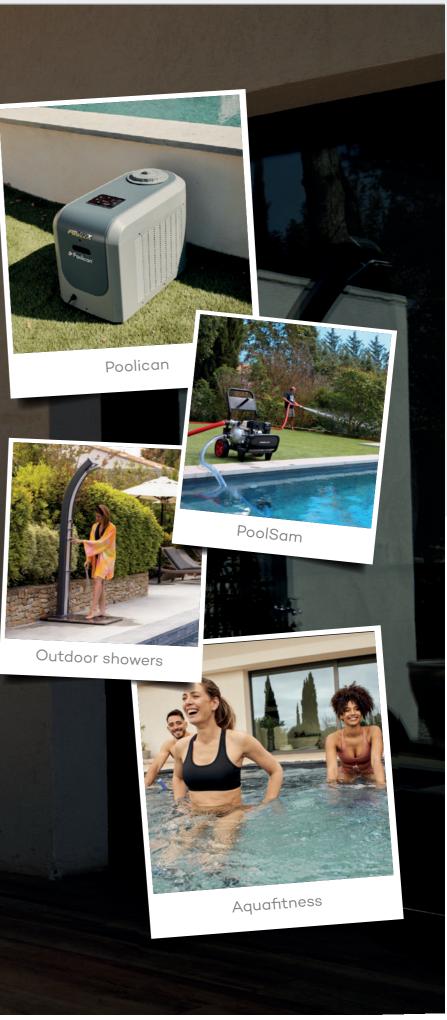

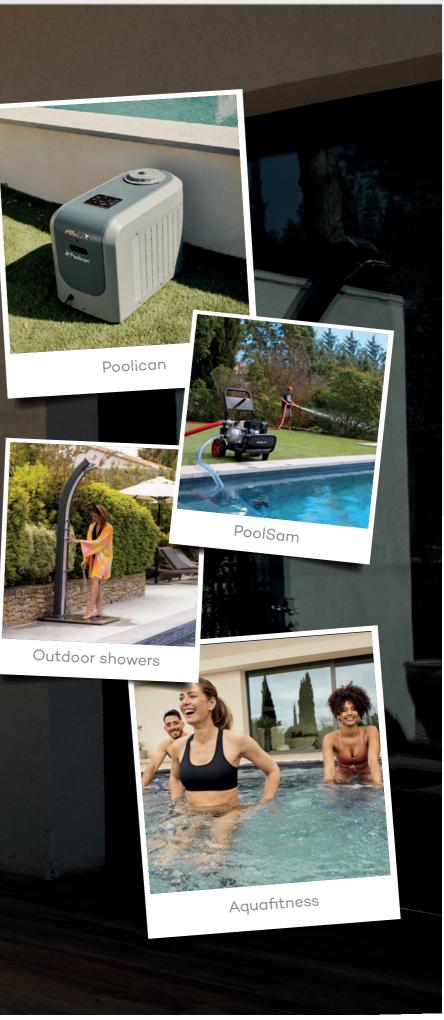







Built-in reversible Full Inverter heat pump

POOL

25



control

All





The Poolican combines the three essential components required for clear and healthy water: **a circulation pump**, an efficient **cartridge filter**, and a **salt chlorinator** for disinfection. And now Poolex is going one step further by integrating the 4th essential component for your comfort: **a reversible Full Inverter heat pump** to ensure your bathers always enjoy the perfect water temperature.

WARRANTY

• 2 years: Poolican

Adjustable

lighting

R	001	1 2.0
Autor	TO MAINTA matic water tment	
1 A A A A A A A A A A A A A A A A A A A	TAL-CLEAR rful cartridge	WATER e filter system
	natic salt wa	HEALTHY WATER ater chlorination
THE E	ENTIRE SEA Full Inverter 8	TURE THROUGHOUT SON & reversible heat
	TING CONTI	ROL
GI	ENERAL SPECI	FICATIONS
Product code		PC-POOLICAN-2GD
Pool volume		25 m ³
Power supply		220-240V~50 Hz
Max output		1 25 kW

POOL EQUIPMENT

GENERAL SPECIFICATIONS			
Product code	PC-POOLICAN-2GD		
Pool volume	25 m ³		
Power supply	220-240V~50 Hz		
Max. output	1.25 kW		
Connectors	1"1/2 + 32 / 38 mm		
Product dimensions	805 x 405 x 595 mm		
Noise level at 10m	≤ 28 dB		
LED lighting	12V DC 60 W		
Warranty	2 years		

CIRC	ULATION
Flow rate	5.5 m ³
Power	140 W

FILTRATION

D127 x H235 antibacterial filter Pureflow optional extra

100

NEW FILTER PUMP

HIGHER FLOW RATE

LESS NOISE

LESS POWER CONSUMPTION



Included Kit for in-ground pools



PREFILTER



CHECK VALVE

5KW HEAT PUMP			
	Capacity	5 kW	
Air 26°C / Water 26°C	Power consumption (W)	0.91 kW	
	COP	5.5	
Temperature range		15 / 40°C	
Operating range		-7 / 43°C	
Refrigerant		R32	
Compressor type		Rotary	
Functions		Heating / Cooling / Auto	


SALT CHLORINATOR			
Salinity	3.5 g/l		
Max. production level	5 g/l		
Cell cleaning	Polarity inversion		
Operating modes	2 modes: normal and boost		





Pool Sam is an **emergency device** that uses **your swimming pool** water to extinguish small fires or contain a fire while you wait for the fire brigade. The average volume of a swimming pool is equal to 4 or 5 Canadairs, a not inconsiderable quantity to have on hand while waiting for the fire brigade.

- WARRANTY
- 2 years: Poolsam

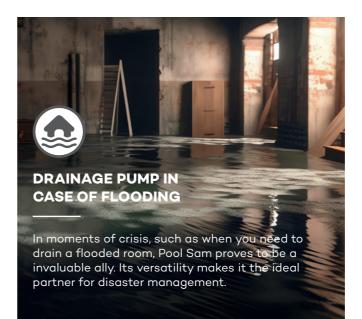

FIRE HOSE Hand-held hose with adjustable jet and flow rate



ATTACK MODE

This fire hose has two operating modes:

- Attack: the water jet is straight and uses a lot of water, required to prevent the fire from spreading.
- **Defence:** the water jet is wider and more dispersed, providing protection against heat and smoke.

Product code	PS-POOLSAM1
Capacity	16 m³/h
Water jet reach	Up to 25m
Combustion engine	4-stroke 7 hp
Positions of use	2 modes Attack / Defence
Weight	45 kg
Pressure at pump outlet and after 25m of hose	7 bar

- Wide coverage area: protects up to 50m around the pool.
- 4-stroke 7 hp combustion engine: up to 4 hours runtime with a capacity of 16m³/h, it can be used during power outages.
- **Dual-function fire hose:** attack mode to fight • incipient fires and defence mode to protect against smoke.











Aluminium shower



Integrated handheld shower head

Poolex is re-releasing its flagship model, the Dada Più. It combines Poolex's hybrid technology with a 40-litre capacity, ensuring warm showers powered by solar energy **regardless of the number of users.** The high quality finish of its stainless steel mixer taps, adjustable shower head and hand shower make this an exceptional addition to your space.

WARRANTY

• 2 years: Dada Più



Rain effect integrated shower head



228 cm



Hot / Cold mixers and diverters

Poolex's hybrid technology lets you enjoy hot showers all year round, whatever the weather.

Solar connection: connect the shower to a cold water supply, naturally heated by the sun.

Domestic hot water connection: add a hot water supply for optimum comfort in all seasons.

Both systems can be used independently for maximum flexibility.


Product code
Materials
Weight
Height
Storage capacity
Base dimensions
Mounting kit
Warranty



Chrome hand-held detachable shower head

HYBRID TECHNOLOGY





DS-D463AW
Aluminium
10 kg
228 cm
40 L
14 x 32.4 cm
Included
2 years









Aluminium shower

Hybrid technology



Poolex is re-releasing its flagship model, the Dada. Available in both straight and curved versions, it combines Poolex's eco-friendly solar technology and 40-litre capacity with a hot water supply to ensure that hot showers are available regardless of the number of users.



Rain effect integrated shower head



Laser-engraved chrome mixer tap

Product code	DS-D463NX	DS-D463AX
Materials	Alun	ninium
Weight	10) kg
Height	228 cm	
Storage capacity	4	0 L
Base dimensions	14 x 3	32.4 cm
Mounting kit	Inc	uded
Warranty	2 y	rears




Integrated hand-

held shower head

WARRANTY

• 2 years: Dada Straight

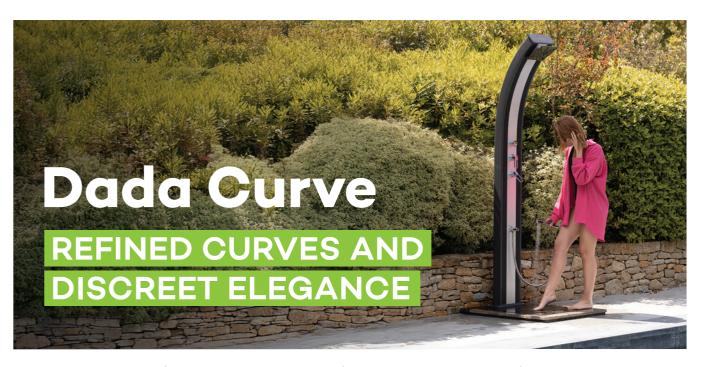



Hybrid technology

Also available in a curved version, the Dada Curve features soft curves and an extra-flat, mirror-effect square showerhead. Its sleek curve allows it to blend naturally into any garden and adds a designer touch.





Rain effect integrated shower head

mixer tap

Product code	DS-D363NO	DS-363NX
Materials	Alum	inium
Weight	10	kg
Height	228	cm
Storage capacity	40) L
Base dimensions	14 x 3	2.4 cm
Mounting kit	Inclu	uded
Warranty	2 ye	ears



Laser-engraved chrome







Jolly Go

SOLAR SHOWER & GARDEN TAP







Solar energy



Detachable handheld shower head

The Jolly Go solar shower will delight anyone looking for a discreet yet high capacity and practical solar shower.

Featuring a thermo-lacquered aluminium tower, **available in 6 colours**, the Jolly Go is equipped with a foot-rinse, a mixer and a hand shower with hose for an easy body rinsing without wetting the hair.

WARRANTY

• 2 years: Jolly Go







Discreet and elegant

Foot-rinse equipped with Gardena® 25 mm connector for watering your garden

Product codes	DS-JG141-6011	DS-JG141NX	DS-JG141-6027	DS-JG141-3016	DS-JG141NO	DS-JG141-5019
Colours	Reseda green	Aluminium	Opaline green	Terracotta	Anthracite	Capri blue
Materials	Aluminium					
Weight	5.5 kg					
Height	120 cm					
Capacity	20 L					
Base dimensions	16 x 18 cm					
Mounting kit	Included					
Warranty	2 years					





Hand-held detachable shower head









Solar energy





Elegant & timeless design

The Spring solar shower in aluminium blends in perfectly with any outdoor space. Its 30-litre reservoir is naturally heated by the sun, providing a 100% environmentally friendly solution. Elegant and lightweight, it can be easily connected to any water supply.






Rain effect integrated shower head

Product code	DS-A122BN	DS-A122NO	DS-A122NX	DS-A122RS
Colours	Anthracite + stainless steel	Anthracite	structure	Pink
Materials		Alum	inium	
Weight	11.5 kg			
Height	228 cm			
Storage capacity	30 L			
Base dimensions	26 x 12 cm			
Mounting kit	Included			
Warranty	2 years			



WARRANTY • 2 years: Spring

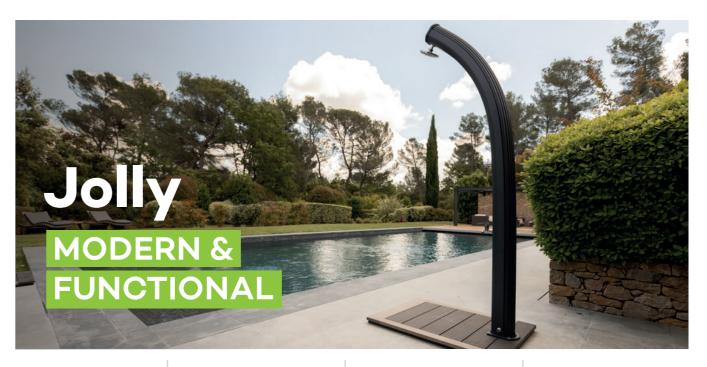



Solar energy

The Jolly solar shower will blend beautifully into any surroundings. Made of aluminium, this designer piece is available in 2 colours. The warmth of the sun is enough to heat the **33-litre reservoir** of the Jolly solar shower. It is therefore **completely eco-friendly**. It can easily be connected to any water supply.





Foot-rinse included

Blends in perfectly with any outdoor space

Product code	DS-A822NO	DS
Materials	Alum	inium
Weight	11	kg
Height	233	cm
Capacity	33	5 L
Base dimensions	16 x 1	.8 cm
Mounting kit	Inclu	ıded
Warranty	2 ye	ears







Easy installation



WARRANTY • 2 years: Jolly









Solar energy






Colourful & original design

A BOLD DESIGN!

A design that combines sleek curves and reptilian detailing. This solar shower becomes a decorative piece in its own right in your garden. Featuring an adjustable rain effect showerhead, mixer tap and stainless steel foot-rinse station, it's also eco-friendly thanks to its **32-litre HDPE body**, which harnesses the power of the sun to provide a warm shower.

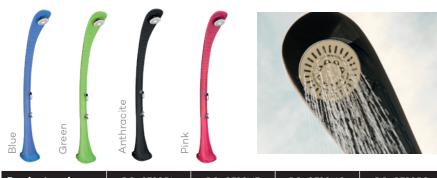

Product code	DS-C720BL	DS-C720VE	DS-C720NO	DS-C720RS
Colours	Blue	Green	Anthracite	Pink
Materials	HD Polyethylene			
Weight	9.5 kg			
Height	217 cm			
Capacity	32 L			
Base dimensions	30 x 34 cm			
Mounting kit	Included			
Warranty	2 years			



WARRANTY • 2 years: Cobra







A bestseller since its launch, the Happy has been reinvented as the So Happy, with a more modern design, greater capacity and, above all, some new finishes that make the So Happy even more attractive.





Foot-rinse included

Product code	DS-H221NO	DS-H221BL	
Colours	Anthracite	Blue	
Materials		HD Polyethylene	
Weight		6 kg	
Height		216 cm	
Capacity		28 L	
Base dimensions	24 x 26 cm		
Mounting kit	Included		
Warranty		2 years	





Foot-rinse included

Colourful design





Colourful & original design



WARRANTY

• 2 years: So Happy









Solar energy





Colourful & original design

The Happy 4x4 solar shower has the largest capacity in the range, with a 44-litre solar heated tank that is 100% environmentally friendly. Made from high-density polyethylene (HDPE), it has a curved and elegant design and is available in 4 different colours to blend in with any outdoor space. It's easy to connect and install, and its flared base ensures stability.



Product code	DS-H422NO	DS-H422BL	DS-H422VE	DS-H422RS
Colours	Anthracite	Blue	Green	Pink
Materials		HD Polyethylene		
Weight		7.5 kg		
Height	229 cm			
Capacity	44 ∟			
Base dimensions	26 x 29 cm			
Mounting kit	Included			
Warranty	2 years			



WARRANTY • 2 years: Happy 4x4





COMPACT AND SOPHISTICATED!

The Happy Go solar shower combines a compact size with high capacity. Supplied with a detachable shower head, it's simple and fun to use. 100% eco-friendly, the warmth from the sun's rays is enough to heat its 23-litre reservoir. It can be easily connected to any water supply. Made from HDPE, the Happy Go is available in anthracite or blue.





Product code	DS-HG142NO	DS
Colours	Anthracite	
Materials	HD Poly	ethylene
Weight	6.5	kg
Height	120	cm
Capacity	23	3 L
Base dimensions	26 x 2	29 cm
Mounting kit	Inclu	ıded
Warranty	2 ye	ears



Designed to blend seamlessly into the garden



Colourful & original design








WARRANTY • 2 years: Happy Go



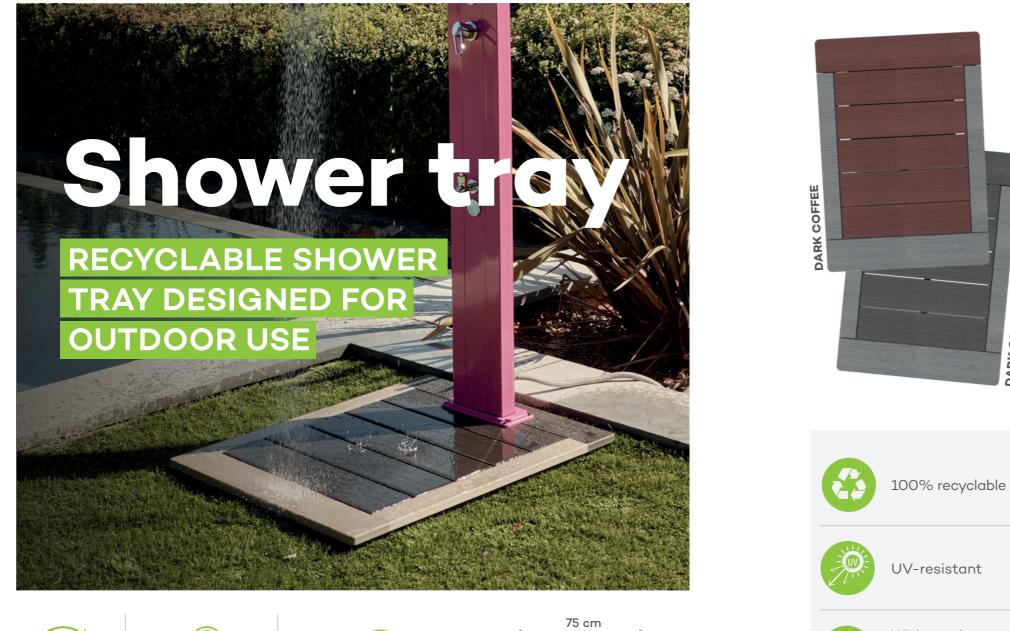



High-quality materials



Compatible with all Poolex showers



WARRANTY

• 2 years: Shower tray


Ideal before and after a swim, when returning from the beach or after a sports session, the Poolex outdoor solar shower offers a moment of relaxing refreshment. To take full advantage of the water without getting your feet wet, make sure to stand firmly on the tray when using the shower.

Product code	DS-BASE-GR	DS-BASE-CF
Colours	Dark Grey	Dark Coffee
Materials	High quality wood effect composite	
Dimensions	75 x 4.3 x 97 cm	
Warranty	2 ye	ars



UV-resistant

Withstands temperatures from -30°C to 70°C



Termite resistant



Easy to install, no need for glue The Poolex shower tray is a great addition to your outdoor shower. Available in dark coffee or dark grey, it's the perfect complement to the space you've created.

off.

GREY

DARK

It can be quickly installed on any flat surface and provides an efficient means of water drainage. The carefully designed platform, measuring 75x97 cm, offers a stable space where you can easily rinse

The composite construction makes this shower tray UV resistant and able to withstand the elements. There is no need to treat it over the seasons, it will not mould or warp. You can spend more time enjoying your solar shower and less time maintaining it!











Aluminium body



ADS double speed pedals

The Elly aquatic elliptical trainer provides a **complete body workout** and is a popular choice for group aquatraining classes. Trainers will appreciate the ability to work the whole body - thighs, calves, glutes, core, arms and shoulders. Users will be seduced by its **ease of use.**

Lightweight and easy to remove from the pool


WARRANTIES

• 2 years: Metal parts

• 6 mois: Consumable parts

- Aqua double speed pedals: The large pedals have flaps that can double the surface area. The pedal position can also be adjusted.
- Silicone wheels: the Elly Air can be easily moved around
- Swing arms: The arms move in unison with the feet, keeping the whole body in sync throughout the aqua-training session.
- Aluminium construction: To increase corrosion resistance, the aluminium range from Waterflex is anodised to a thickness of 25 microns, i.e. Class 25, normally reserved for industrial applications.
- White stabilising feet

Product code	WX-ELLY-AIR
Quality	T6 aluminium alloy
Resistance	Swing arms with perforated paddles for more hydraulic resistance
Adjustable	Yes
Dimensions	118 x 56 x 179 cm (LxWxH)
Weight	23 kg
Water depth	1.10 to 1.50 m
Warranty	2 years

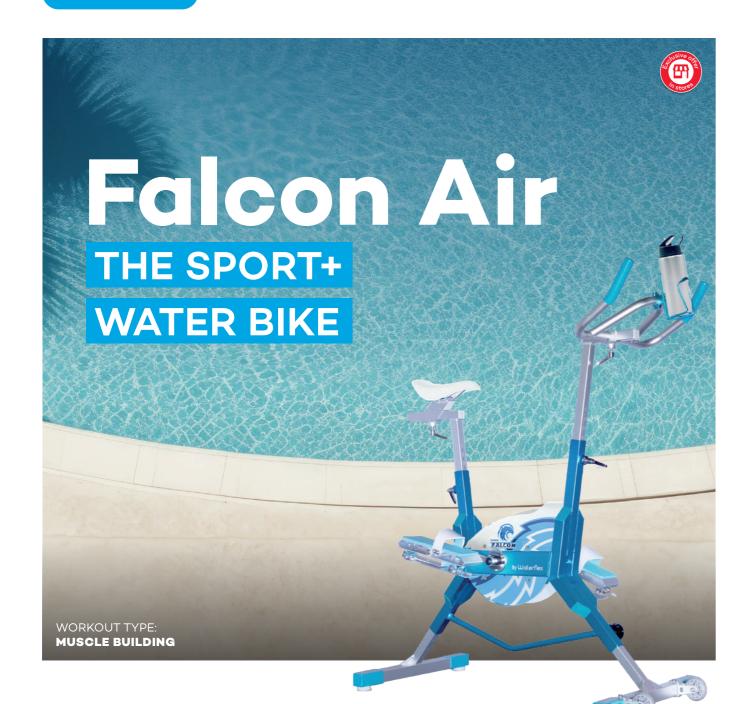





Fully-equipped Aquabike



ADS double speed pedals



Corrosion resistant

WARRANTIES

- 2 years: Metal parts
- 6 mois: Consumable parts

4 INTENSITY LEVELS

Falcon Air's Aquapalm system consists of **4 blades to increase performance.** Their curved shape provides additional force against the water and increases resistance. **This hydraulic resistance system can be adjusted by the user,** even from a seated position, by rotating each blade.

FOR ALL POOLS & LIFTS



SPORT+ PACK INCLUDED



Training handlebar

Comfortable saddle

Product code	WX-FALC4A
Quality	T6 aluminium alloy
Minimum dimensions folded	L 94 x W 55 x H 116 cm
Maximum dimensions unfolded	L 122 x W 55 x H 153 cm
Weight	15.8 kg
Water depth	1.10 m to 1.50 m
Warranties	2 years for metal parts 6 months for consumable parts

Our most complete aquabike

This sports version is intended for those who wish to combine cardio-training with muscle building. **It is designed for intensive use in chlorinated or salt water,** ideal for getting back into shape or aquatherapy.








Isothermal water bottle

Bottle holder



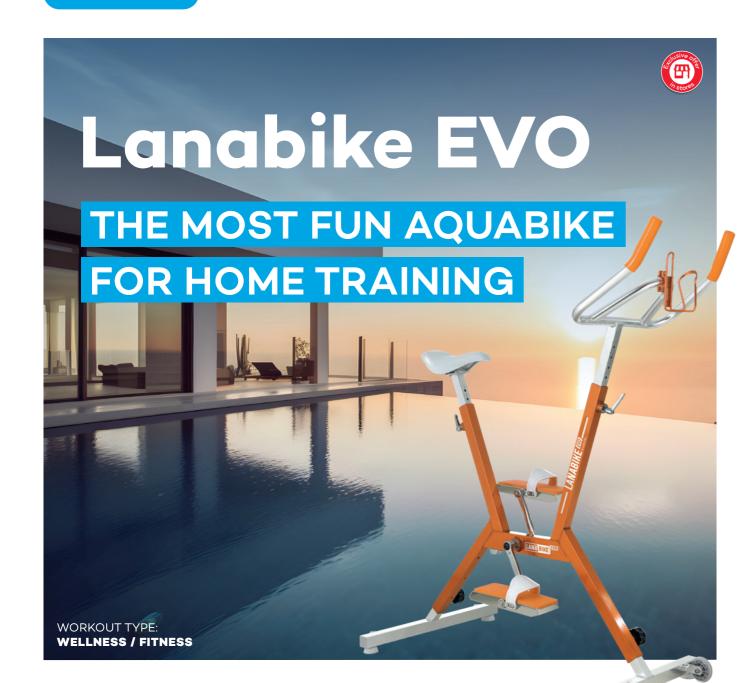





Ideal for shaping your figure



ADS double speed pedals




The swimming pool revolution!

With the Lanabike Evo, Waterflex is revolutionising the world of aquabiking in private pools. The revolutionary Aqua Double Speed pedal system provides hydraulic resistance to match the cardiovascular workout while maintaining joint health. Equipped with an anodised aluminium structure, the Lanabike Evo is easy to use for those who want to enjoy their pool and keep fit.

WARRANTIES

• 2 years: Metal parts

• 6 mois: Consumable parts

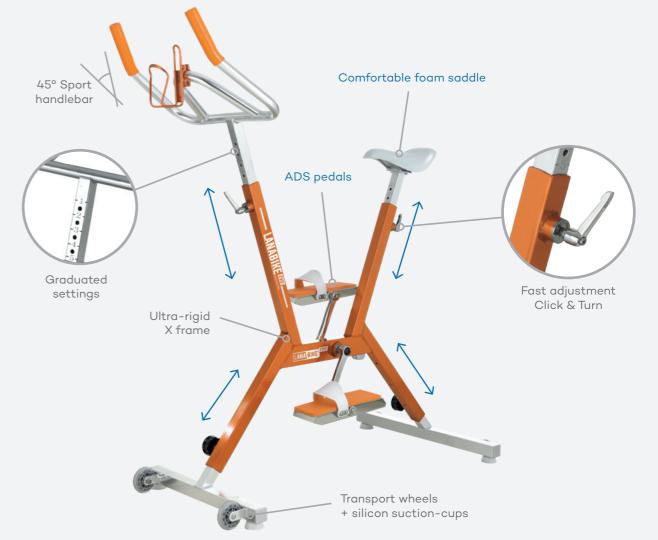

AQUA DOUBLE SPEED PEDALS

The ADS pedals are made from **aluminium** and are equipped with a hinge-mounted folding flap. These unfold and lock into place in a single gesture and increase hydraulic resistance by 54%. By doing so, you can make your cardio session harder.

Reference	WX-LANA2-OR
Tech Aluminium	T6 aluminium alloy
Anodised	25 µm
Minimum dimensions closed	L 96 x W 55 x H 120 cm
Maximum dimensions open	L 120 x W 55 x H 164 cm
Weight	9.9 kg
Water depth	1.10 m to 1.60 m
Warranties	2 years for metal parts 6 months for consumable parts



ACCESSORIES INCLUDED




Isothermal flask



Comfortable saddle



Bottle holder

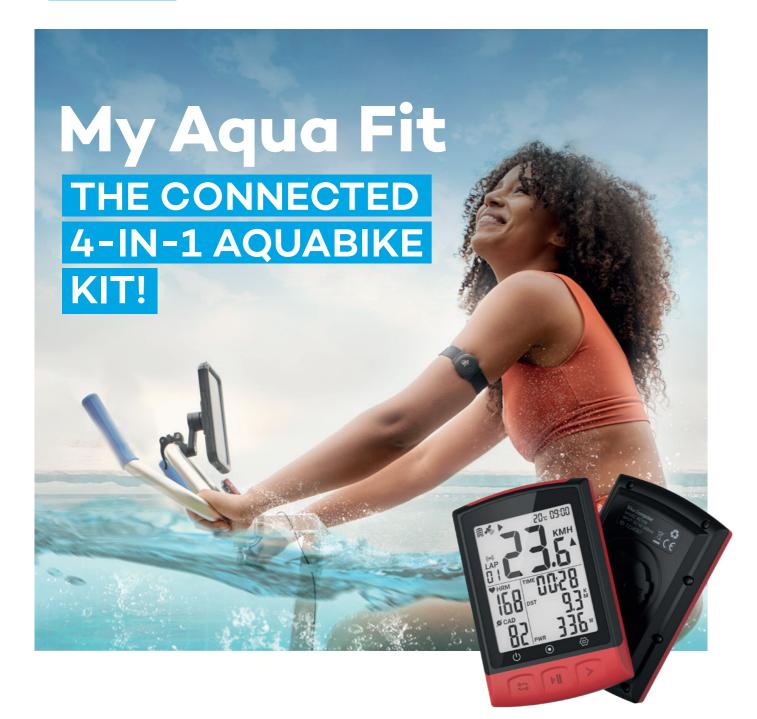



28 hours of battery life



Waterproof IP67



Bluetooth 5.0



Track your performance in real time on the screen and view your **stats** in an instant. The **waterproof case** keeps your phone safe so you can race against others on **Zwift** or sync your workout with Strava. You can even take an Aquabike video class!

WARRANTY

• 2 years: My Aqua Fit





CONNECTED POOL EQUIPMENT

Your Aquabike's sensor data is **stored and uploaded** to your smartphone via a waterproof wired connection using a free app.

The app lets you view your data on your smartphone or on a bike computer mounted on the handlebars. You now have information to personalize your training session.

INCLUDED IN THE PACK



Armband heart rate monitor

+



- Accurately track your training to optimise performance
- Heart rate analysis with the heart rate monitor armband
- Calculate calories burned See the effectiveness of your workout
- Compatible with Strava and Zwift apps Share your results with your friends
- Waterproof case for smartphones included



Bike computer





Waterproof case for phone



AVAILABLE AT MAJOR RETAILERS & ONLINE



POOL **& GARDEN**



A wide range of heat pumps, pool equipment and outdoor showers.


RELAXATION **& WELLNESS**



Collection of ice baths & acrylic, semi-rigid and inflatable spas



France Sauna Collection of steam, infrared and hybrid saunas.

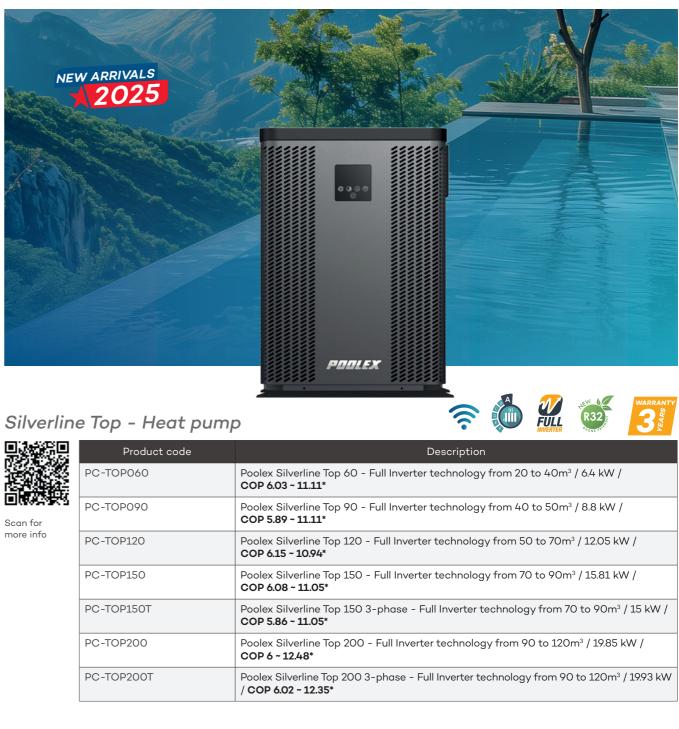

	Product code	
	PC-TOP060	Poolex Silverline Top 60 COP 6.03 ~ 11.11*
2	PC-TOP090	Poolex Silverline Top 90 COP 5.89 ~ 11.11*
	PC-TOP120	Poolex Silverline Top 120 COP 6.15 ~ 10.94*
	PC-TOP150	Poolex Silverline Top 150 COP 6.08 ~ 11.05*
	PC-TOP150T	Poolex Silverline Top 150 COP 5.86 ~ 11.05*
	PC-TOP200	Poolex Silverline Top 20 COP 6 ~ 12.48*
	PC-TOP200T	Poolex Silverline Top 200 / COP 6.02 ~ 12.35*



Silent Max - Heat pump Description lex Silent Max 80 Full Inverter technology from 35 to 50m³ / kW / COP 13.5* lex Silent Max 125 Full Inverter technologyfrom 50 to 70m³ / 8kW / COP 15.5* lex Silent Max 155 Full Inverter technologyfrom 65 to 85m³ / W / COP 16.6*

Product code	
PC-SLM080	Poole 7.45k
PC-SLM125	Poole 12.3k
PC-SLM155	Poole 15kV







Jetline Selection Fi - Heat pump Product code Description Poolex Jetline Selection Fi 75 Full Inverter technology from 30 to 45m³ / 71kW / **COP 13.6*** PC-JLS075N

	from 30 to 45m ³ / 7.1kW / COP 13.6°
PC-JLS095N	Poolex Jetline Selection Fi 95 Full Inverter technology from 40 to 50m³ / 9.5kW / COP 14 *
PC-JLS125N	Poolex Jetline Selection Fi 125 Full Inverter technology from 45 to 65m ³ / 11.9kW / COP 16.4 *
PC-JES155Ne FI	Poolex Jetline Selection Fi 155 Full Inverter technology from 65 to 80m ³ / 15.3kW / COP 16.3*
PC-JLS210N	Poolex Jetline Selection Fi 210 Full Inverter technology from 80 to 110m ³ / 20.1kW / COP 16.5 *

While stocks last



Mag Fi - Heat pump

Product code



PC-MAG040FI PC-MAG050FI



Product code	Description
PC-SLP070N	Poolex Silverline Fi 70 - Full Inverter technology from 30 to $45m^3$ / $6.8kW$ / COP 12.9*
PC-SLP090N	Poolex Silverline Fi 90 - Full Inverter technology from 40 to 50m ³ / 9.5kW / COP 13.9*
PC-SLP120N	Poolex Silverline Fi 120 - Full Inverter technology from 45 to 65m ³ / 11.3kW / COP 16.1*
PC-SLP150N	Poolex Silverline Fi 150 - Full Inverter technology from 65 to 80m ³ / 14.5kW / COP 16.1*
PC-SLP200N	Poolex Silverline Fi 200 - Full Inverter technology from 80 to 110m ³ / 19.2kW / COP 16.2*



Mag R - Heat pump

duct code

	Product co
	PC-MAG030
Can for	PC-MAG040
nore info	PC-MAG050

		Kan
X		

CONSIDER CARRYING OUT A THERMAL ANALYSIS a di Di

The water heating capacities specified for our pool heat pumps are maximum estimates for information purposes only, based on favourable conditions and geography. To ensure optimum efficiency, it is essential to carry out an accurate thermal analysis to determine the exact power required according to the characteristics of each installation.





Product code	Description
PC-SLP055	Poolex Silverline 55 from 20 to 30m ³ / 5.39kW / COP 6.13*
PC-SLP070	Poolex Silverline 70 from 30 to 40m ³ / 7.02kW / COP 6.21*
PC-SLP090	Poolex Silverline 90 from 40 to 50m ³ / 9.31kW / COP 6.17*
PC-SLP120	Poolex Silverline 120 from 45 to 65m ³ / 12.5kW / COP 6.22*
PC-SLP150	Poolex Silverline 150 from 65 to 75m ³ / 15.24kW / COP 6.2*
PC-SLP220	Poolex Silverline 220 from 80 to 110m ³ / 21.72kW / COP 6.19*
	While stocks last

Scan for more info







Poolex Mag Full Inverter 5kW - up to 35m³ / COP 12.5*

	R32	2 S
Description		
Poolex Mag 3 kW - up to 21m ³ / COP 5.5*		
Poolex Mag 4 kW - up to 28m ³ / COP 5.5*		
Poolex Mag 5 kW - up to 35m ³ / COP 5.8 *		







미신

Scan for more info




Onduline - Multi-speed pump			
	Product code	Description	
Scan for more info	PF-OL15	Poolex Onduline filtration pump - 1.5 horsepower with RCD plug	



	Product code	Description
	PF-TNC050	Poolex Tonic 0.5 hp - 220V/50Hz
5	PF-TNC075	Poolex Tonic 0.75 hp - 220V/50Hz - Max. flow rate 11 $\rm m^3/h$
	PF-TNC100	Poolex Tonic 1 hp - 220V/50Hz - Max. flow rate 17 m 3 /h
	PF-TNC150	Poolex Tonic 1.5 hp - 220V/50Hz - Max. flow rate 19 m 3 /h

2

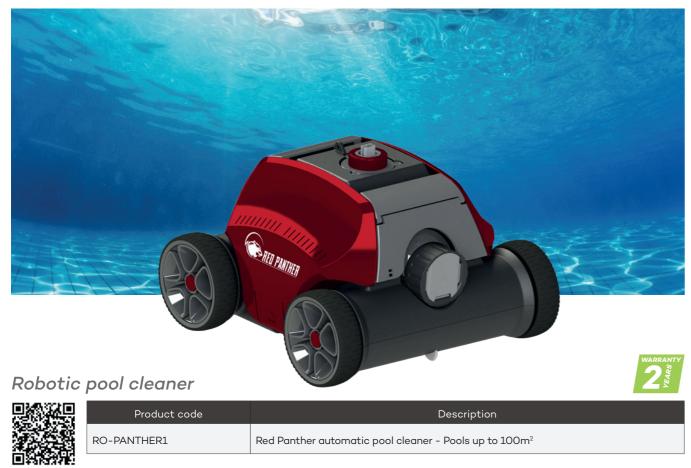





Filtration unit - Blue Silk









Optimax

Hose

Filter Max accessories

Product code	
PF-OPTIBALL700C	Optimax Balls – 700g (equivalen
PF-OPTIMAXC	Ball cartridge 100g – Type A puri
PF-FILTERTUYAU8	Universal replacement hose 8m -
PF-FILTERVANNE3	3-way stop valve (compatible wit
PF-FILTERCOLLIER32	Set of 2 universal hose clamps Ø
PF-FILTERCOLLIER38	Set of 2 universal hose clamps Ø

Product code
JL-P11358FR

Description

3m³/h filtration unit (filter + circulation pump)



Filter Max - Filtration unit

roduct code	Description
LMAX04	Poolex Filter Max - Tank Ø250mm - 4.8m³/h / 80W
LMAX06	Poolex Filter Max - Tank Ø250mm - 6.8m³/h / 140W
LMAX08	Poolex Filter Max - Tank Ø400mm - 8m³/h / 250W
LMAX10	Poolex Filter Max - Tank Ø400mm - 10m³/h / 400W



3-way valve

Hose clamp

Description

ent to 25kg of sand)

irifier replacement

- Can be cut to size - Ø38mm - Intex/Bestway compatible

vith Intex/BW/Ø50mm)

Ø32mm

038mm











Product code	Description
Opti Top	
PF-OPT450T	Poolex OPTI TOP - P450 - Ø18" - Valve 1"1/2 / 50mm - Max. flow rate 7.8 m³/h
PF-OPT500T	Poolex OPTI TOP - P500 - Ø21" - Valve 1"1/2 / 50mm - Max. flow rate 10.8 m³/h
PF-OPT650T	Poolex OPTI TOP - P650 - Ø25" - Valve 1"1/2 / 50mm - Max. flow rate 15.3 m³/h
Opti Side	
PF-OPT450S	Poolex OPTI SIDE - SP450 - Ø18" - Valve 1"1/2 / 50mm - Max. flow rate 7.8 m³/h
PF-OPT500S	Poolex OPTI SIDE - SP500 - Ø21" - Valve 1"1/2 / 50mm - Max. flow rate 10.8 m³/h
PF-OPT650S	Poolex OPTI SIDE - SP650 - Ø25" - Valve 1"1/2 / 50mm - Max. flow rate 15.3 m³/h
PF-OPT700S	Poolex OPTI SIDE - SP700 - Ø28" - Valve 1"1/2 / 50mm - Max. flow rate 19.2 m³/h

Single-cartridge filter - Netflux



Product code	Description
PF-NFX025	Poolex Netflux Single-cartridge filter - 2.25m³/h / Max. flow rate 5.5 m³/h
PF-NFX050	Poolex Netflux Single-cartridge filter - 4.63m³/h / Max. flow rate 11.4 m³/h
PF-NFX075	Poolex Netflux Single-cartridge filter - 7m³/h / Max. flow rate 17 m³/h
PF-NFX100	Poolex Netflux Single-cartridge filter - 9.40m³/h / Max. flow rate 22.9 m³/h
PF-NFX025CT	Cartridge for NFX025 filter
PF-NFX050CT	Cartridge for NFX050 filter
PF-NFX075CT	Cartridge for NFX075 filter
PF-NFX100CT	Cartridge for NFX100 filter

POOLEX Turbo<mark>Salt</mark>

Scan for more info • (U)

í.

Salt chlorinator - Poolex Turbo Salt

Surt critor
Product co
CL-TS100
CL-TS200
CL-TS300
CL-TS400
CL-TS600
CL-TS800
Replacement c
CL-TS100L
CL-TS200L
CL-TS300L
CL-TS400L
CL-TS600L
CL-TS800L
Accessories
CL-TSLFIX
CL-POOLTERR
CL-TSLCAP
CL-TSLTUBE
and and





3

le	Description
	Poolex Turbo Salt chlorinator up to 10m³
	Poolex Turbo Salt chlorinator up to 20m³
	Poolex Turbo Salt chlorinator up to 30m ³
	Poolex Turbo Salt chlorinator up to 40m ³
	Poolex Turbo Salt chlorinator up to 60m ³
	Poolex Turbo Salt chlorinator up to 80m³
ells	-
	Replacement cell for Poolex Turbo Salt TS100
	Replacement cell for Poolex Turbo Salt TS200
	Replacement cell for Poolex Turbo Salt TS300
	Replacement cell for Poolex Turbo Salt TS400
	Replacement cell for Poolex Turbo Salt TS600
	Replacement cell for Poolex Turbo Salt TS800
	Mounting bracket for Poolex Turbo Salt / Sel-In chlorinator
50	Pool-Earth - Kit for grounding PVC D50 pipe
	End cap for performing maintenance on Poolex Turbo Salt / Sel-In chlorinator

Delivery costs for chlorinator and cell 17 \oplus / Accessories: 12 \oplus

Winter cover for Poolex Turbo Salt / Sel-In chlorinator



Mutli-position bracket included

Waterflex





WR 3 15 WR 5

Aquabikes

i di sag

Scan for more info

Product code	Description		
	Aquabike with aluminium frame		
WX-WRMAX1	WR MAX - Aquabike aluminum		
WX-WR3A	WR3 AIR - Aquabike aluminum		
WX-WR4A	WR4 AIR - Aquabike aluminum		
WX-WR5A	WR5 AIR - Aquabike aluminum		
Aquabike with stainless steel frame			
WX-WR3	WR3 - Aquabike steel		
WX-WR5	WR5 - Aquabike steel		





Aquajogg AIR

Product code

Aquatraining

Compfor	

Scan for more info

Wx Tramp water trampoline		
WX-TR4-ROND	WxTramp Premium Round	
WX-TR4-HEXA	WxTramp Premium Hexagonal	
WX-TR4-JBAR	Grab bar for WxTramp	
Treadmill		
WX-AQUAJOGG2	Aquajogg Air - Aluminium water treadmill	
WX-AQUAJOGG	Aquajogg Air - Stainless steel water treadmill	
Floating exercise mat		
WX-AQUAFITMAT	AquaFitMat floating exercise mat (Attachmen	
WX-AQUAFM-COACH	Coaching mat for AquaFitmat	



g exercise mat (Attachment kit included)

Description

Waterflex



Storage trolley for AquaFitmat

Product code	Description
WX-CARTMAT5	Storage trolley for 5 floating mats

Pool lift - Aquabike lift

Product code	Description
WX-AQUALIFT	Aquabike pool lift Aquabike Lift





ADS folding pedals Comfortable saddle

le saddle Resistance bands

Multitraining aluminium handlebar



m Spor

Accessories

Product code	Description	
Aquabike accessories		
WX-ADSP-BL	ADS folding pedals for aquabike (set of 2) blue	
WX-ADSP-OR	ADS folding pedals for aquabike (set of 2) Orange	
WX-ASSP-BL02	ADS folding pedals for aquabike (set of 2) light blue	
WX-AHP-RS01	Set of 2 HAPPY metal pedals - Fuschia	
WX-STC-VE02	Aquabike resistance band - 2 resistance levels - Green	
WX-RIDERBAR-33	Multitraining aluminium handlebar: compatible with Ino 6 Air, Ino 7 Air, Ino 8 Air, WR Max	
WX-SADDLE-W3	Comfortable saddle	
WX-BOTTLE-01W	Waterflex water bottle - White	
WX-BOTTLE-03S	Waterflex aluminium water bottle - Silver	
PS-RENOVX-125	Renov'Inox 125ml	
WX-RENOVX-125	Renov'Inox pack: 1 125ml bottle + 1 sponge + 1 microfibre cloth	
WX-SPORTBAG01	Sports bag Blue	



 Product code
 Description

 SP-JRV300
 Ice bath Netspa Järvi (1700 x 920 x 670 mm)

 Scan for
 Scan for

Scan for more info



Ice bath - UFC

Product code	
SP-UFC301	Netspa UFC ice bath
SP-UFC301-CK5	Netspa UFC ice bath
SP-UFC250	Netspa UFC ice bath
SP-UFC250-CK5	Netspa UFC ice bath C





Octogone + Step - Chiller kit 3-40°C 5kW included






Octopus with furniture





Module A





Description



Module D

Module C

Module E

2

Vita with furniture




Vita Premium with furniture

Product code

Semi-rigid spas and furniture



Scan for more info

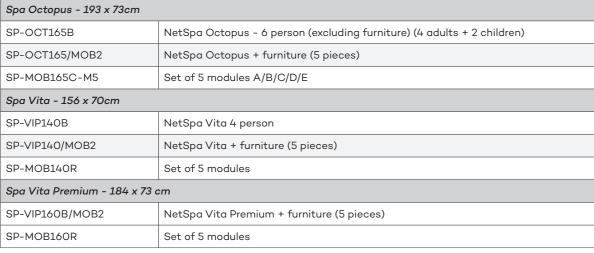





Spa accessories

Product code	Description	
SP-N1408778	Antibacterial cartridge filters (Set of 3) for inflatable and Octopus + Vita semi-rigid spas	
SP-N1408785	Antibacterial cartridge filters (Set of 3) for Vita Premium	
SP-N1407535	Next generation cartridge filter (Set of 3)	
SP-N1408761	Filter mounting unit with antibacterial cartridge	
SP-N1405173	2 x Headrests & 1 x cup holder for inflatable spa	
SP-NHEAD809	NetSpa Headrest & cup holder (2-in-1) for Octopus	
SP-N1405227	Inflatable bar	
SP-N1405548	Foot-rinse station	
SP-N1405869	Inflatable cover for 4-person square spa - 128 x 128 cm	
SP-N1414014	Inflatable cover for 4-person square spa - 135 x 135 cm	
SP-N1405203	Inflatable cover for 4-person round spa - Ø 140cm	
SP-N1407528	Inflatable cover for 5/6-person octagonal spa - 155x155cm	
SP-NOXYTAB-20	NetSpa active oxygen treatment - 20 x 20g tablets	
SP-CLEANER-15	NetSpa Cleaner - Spa vacuum cleaner	
SP-CLEANER-25	NetSpa Cleaner Super Vac - Spa vacuum cleaner with telescopic handle	
SP-NCUSH786	NetSpa Coussin comfortable foam seat for spa - Set of 2	
JL-P14106	Pureflow cartridge filters for NetSpa spa	

Cantilever parasol with integrated LED lighting

de	Description
	Complete parasol (base + parasol)
	Parasol base (only)
	Parasol (only)





Sense 4 person



Sauna pack included



Harvia Vega electric heater + stones and sauna kit included (bucket + ladle + thermometer and hygrometer)

Steam s	saunas -	Sense
---------	----------	-------

	Product code	Description
	SN-SENSE-3PK	SENSE 3 traditional sauna - 3.5 kW - 3 person - Dim. 153 x 110 x 190 cm
<u>on stand</u>	SN-SENSE-4PK	SENSE 4 traditional sauna - 4.5 kW - 4 person - Dim. 150 x 150 x 200 cm

Scan for more info






Zen 2 person

Zen 3 person



Zen 3/4 person

Zen 4 person





Harvia Vega electric heater + stones and sauna kit included (bucket + ladle + thermometer and hygrometer)

Steam s	aunas	-	Zen
	Dro	Sdu	at anda

	Product code	Description
	SN-ZEN2PK	ZEN traditional sauna - 3.5 kW - 2 person - Dim. 120 x 110 x 190 cm
	SN-ZEN3PK	ZEN traditional sauna - 3.5 kW - 3 person - Dim. 153 x 110 x 190 cm
Scan for more info	SN-ZEN3CPK	ZEN traditional sauna - 4.5 kW - 3 corner seats - Dim. 150 x 150 x 200 cm
	SN-ZEN4PK	ZEN traditional sauna - 6 kW - 4 person - Dim. 198 x 174 x 200 cm





2 person

2/3 person

Infrared saunas - Apollon - QUARTZ TECHNOLOGY

	Product code	Description
	SN-APOLLON-Q2	APOLLON infrared sauna - 2 person - Dim. 120 x 123 x 190 cm
Scan for	SN-APOLLON-Q2C	APOLLON infrared sauna - 2/3 person - Dim. 120 x 120 x 190 cm
more info	SN-APOLLON-Q3	APOLLON infrared sauna - 3 person - Dim. 153 x 128 x 190 cm
	SN-APOLLON-Q3C	APOLLON infrared sauna - 3/4 person - Dim. 150 x 150 x 190 cm



Infrared sauna - Spectra - DUAL HEALTHY TECHNOLOGY

Product code	
SN-SPECTRA03R	Spectra Infrared Sauna -
SN-SPECTRA05R	Spectra Infrared Sauna -

Scan for more info



3 persons


3/4 person

Woodwork warranty
increasing from
4 to 7 years





4 persons





22/10/2024

ARTICLE 1 - APPLICATION OF THE GENERAL TERMS AND CONDITIONS OF SALE

terms and conditions of sale apply to professional customers (hereinafter referred to as the "Buyer") wishing to market factured or distributed by POOLSTAR, including those under the POOLSTAR brands (hereinafter referred to as the

"Equipment". Placing an order implies the Buyer's full and unreserved acceptance of these general terms and conditions of sale, to the exclusion of any other document, such as brochures or catalogs issued by POOLSTAR, which are for informational purposes only (non-contractual visuals that may be modified at any time at POOLSTAR's discretion). No special conditions may prevail over these general terms and conditions of sale unless formally and expressly accepted in writing by POOLSTAR. Any conflicting terms proposed by the Buyer will, unless expressly agreed upon, be unenforceable against POOLSTAR, regardless of when they are brought to its attention. **Aptrice 12 - OPDEDE**

ARTICLE 2 - ORDERS

ARTIGLE 2 - URDERS Orders are considered final only after written acceptance by POOLSTAR. From the moment the order is confirmed in writing by POOLSTAR, it is deemed firm and final, cannot be modified, and binds the Buyer to payment. tions of sale apply to all quotes issued by POOLSTAR.

ARTICLE 3 - DELIVERY

Delivery Time

rivise expressly stated, delivery will occur within a maximum of sixty (60) days following the date of receipt of payment by POOLSTAR ULSTAR. Very times are indicative, and any delay does not entitle the Buyer to cancel the sale, refuse the Equipment, or claim any iholding, compensation, penalty, or damages.

Delivery Delivery Delivery Delivery Delivery Delivery to a third party in the Buyer must inform the recipient of all necessary inform

Deniery for the Equipment is detined to be indee to use recipient's adures provided by the buyer, underivered unless expressly agreed otherwise between the parties. For delivery to a third party, the Buyer must inform the recipient of all necessary information for proper unloading of the Equipment. The Buyer must also inform the recipient of the recepient of all necessary information needs to be changed. POLCTRAR reserves the right to charge the Buyer for costs associated with redirecting the Equipment. Any order amounting to £1,650 (excl. VAT) or more, delivered within mainland France, will be free of shipping charges, except for direct to be more delivation cancer and endire more.

lirect-to-home deliveries, saunas, and acrylic spas. The transfer of risk for the Equipment, even in the case of agreed-free deliveries, occurs upon the Equipment's departure from

The transfer of risk for the Equipment, even in the case of agreed-free deliveries, occurs upon the Equipment's departure trom POOLSTAR's warehouses. The Equipment is transported at the Buyer's risk. In the event of damages or partial delivery, the Buyer must make the necessary observations within the required timeframes. The Buyer must then confirm their reservations on the delivery slip and, if necessary, refuse the Equipment in the event of observed damage. The Buyer must then confirm their reservations to the carrier via registered mail with acknowledgment of receipt within three (3) days of receipt of the Equipment, in accordance with Article L 133-3 of the French Commercial Code. (For information: the simple note "subject to unpacking" on the delivery slip does not constitute a claim.) **Reception Procedure** Upon receipt of the products, the recipient must verify their compliance with the order and the absence of viaible defects. Each package must be inspected, and in the case of visible damage, the contents must be checked to confirm the condition of the products and quantities. Results must be recorded with complete and reasoned reservations on the delivery receipt, along with a signature, date, and company stamp. Reservations must be confirmed to the carrier by registered letter with acknowledgment of receipt (LRAR) within three days (excluding public holidays), in accordance with Article L 133-3 of the French Commercial Code. Notes such as "subject to unpacking," "intact boxes, damaged products," or "damaged boxes" will not be cacepted.

public holidays), in accordance with Article L 133-3 or the French Commercial Code, notes such as subject to unpacking, instact boxes, damaged products, "or "damaged boxes" will not be accepted. If the driver cannot wait (legal waiting time of 15 minutes), the recipient can note on the receipt, "inspection not possible; driver cannot wait," and confirm their reservations by LRAR within three days. The Buyer must provide justification for any defect or shortage observed and inform POOLSTAR within 48 hours in case of damage or an incomplete order. Beyond this deadline, the delivery will be considered compliant. POOLSTAR is deemed to have fulfiled to advery obligation once it has handed over the ordered goods to the carrier or the client.

ARTICI F 4 : TRANSFER OF OWNERSHIP AND RETENTION OF TITLE CLAUSE

LSTAR retains ownership of the Equipment until full payment of the price, regardless of the delivery and payment terms, with understanding that risks are transferred to the Buyer upon the Equipment leaving POOLSTAR's warehouses. sequently, the Buyer must take out an insurance policy guaranteeing, from the moment of delivery, risks such as loss, theft, and erioration of the sold goods, as well as damages they may cause.

deterioration of the sold goods, as well as damages they may cause. Identification of the Equipment The Buyer is responsible for ensuring the identification and individualization of the Equipment, avoiding unpacking or merging it into a common stock. In the event of receivership or liquidation, the Buyer undertakes to have the administrator, trustee, or representatives of creditors draw up a complete inventory of the Equipment. Similarly, POOLSTAR may unilaterally, after sending a formal notice, prepare or have an inventory prepared of its Equipment. It he possession of the Buyer, who agrees in advance to grant unrestricted access to their warehouses, stores, or other locations for this purpose. Claim

Caim in the event of non-payment by the Buyer, and without waiving any of its rights, POOLSTAR may demand, via registered letter with acknowledgment of receipt, the return of the Equipment at the Buyer's expense and risk. Receivership and Liquidation The Buyer undertakes to inform POOLSTAR of any changes in its situation, including its declaration of insolvency.

ARTICLE 5 - COMPLIANCE

Upon delivery of the Equipment, the Buyer must ensure its good condition and compliance with the order. It is understood that the characteristics of the Products mentioned in our catalogs and/or on our website (visuals, dimen descriptions, weight, etc.) are for general informational purposes only and are not contractual commitments. These character are subject to chance without redice.

are subject to change without notice. In the event of non-compliance of the delivered Equipment with the order, the Buyer must notify POOLSTAR in writing within three (3) days of neceriving the Equipment and provide POOLSTAR with all documents demonstrating the non-compliance of the delivered Equipment. If POOLSTAR confirms the non-compliance, the Buyer may obtain at POOLSTAR's discretion, either the replacement of the Equipment to a refund of the purchase price within thirty (30) days of the Buyer's written request. Furthermore, the Buyer may return the Equipment to POOLSTAR provided it is in perfect condition in its original packaging. Prior to returning any Equipment, the Buyer must contact POOLSTAR's customer service to obtain the return procedure; otherwise,

ARTICLE 6 - WARRANTIES

Legal Warranty for Hidden Defects (Articles 1641 and following of the French Civil Code) POOLSTAR guarantees the absence of hidden defects rendering the sold Equipment unfit for its intended use or significantly diminishing its usefulness to such an extent that the Buyer would not have acquired it or would have paid a lower price if they had

The defect must predate the sale

The duration of this warranty is two (2) years from the discovery of the defect.
 The Buyer may only benefit from the warranty is two (2) years from the discovery of the defect.
 The of the other of the defect.

Contractual Warranty
The Buyer agrees to review the warranty offered by POOLSTAR and communicate the terms of this warranty to intermediaries or

The Buyer agrees to review the warranty offered by POOLSTAR and communicate the terms of this warranty to intermediaries or end-users. The Equipment is delivered with a manual specifying the scope and specifics of the warranty applicable to the product range. For any Equipment (except product categories specifically mentioned in the manual), the warranty duration is two (2) years from the date on the sales invoice for the new product sold by the Buyer to its end-user. Any intervention under warranty does not extend the warranty preind. Any Equipment Intended to benefit from the warranty must first be submitted to POOLSTAR's after-sales service by creating a service file (SAV) via the platform: <u>https://assistance.poolstarf</u>, where all specific terms concerning after-sales service are provided. Warranty coverage is subject to the Buyer providing the invoice issued to the end-user. In any case, the warranty is limited to. is limited to: Repairing or exchanging for a new or refurbished product, or issuing a credit note for the price of the defective Equipment recognized by POOLSTAR; The costs of reshipping the repaired or replaced Equipment to the Buyer; Workshop labor costs.

Costs Covered by the Buyer

rer: Shipping costs for sending the Equipment to POOLSTAR; Potential installation, removal, draining, refilling, or treatment costs (e.g., products, etc.); Any applicable customs duties or local taxes.

General Limitations

General Limitations The contractual warranty does not cover issues arising wholly or partially from negligence, misuse, abusive or unconventional use, inadequate or improper maintenance, incorrect repairs performed by unauthorized third parties, failure to follow installation or storage instructions, or defects due to external causes (natural or technological disasters, etc.). The Suyer agrees to store the Equipment under appropriate conditions. The warranty does not cover consumables, tears, holes, stains, natural wear and tear, or external accidents.

Responsibilities

Under no circumstances will POOLSTAR be held liable for damages of any kind that may result from improper adaptation of the Equipment, defective use, or loss of profit caused by operational stoppages due to non-compliance of the sold Equipment. Equipment, descure due, or loss of primeters of the Equipment If the Equipment is deemed compliant, costs related to handling the return and any expenses resulting from the claim will be borne for the Bowers and many terminoting by POOLSTAR.

ARTICLE 7 – AFTER-SALES SERVICE OUTSIDE WARRANTY

RIFICLE / AT LENGALLO SILLO SI

is minised to the (1) month, Autrice, recommendations, on recumal assistance provided need change are no monimational purposes only and do not lengage POOLSTAR's liability in any way. If during the repair process additional defective components are identified, POOLSTAR will provide a new quote for the Buyer's approval before proceeding.

oval before proceeding. Brition Period for Equipment Equipment will be retained at POOLSTAR's facilities for one (1) month from the date the quote is received by the Buyer. If no ones is provided by the Buyer within this period, the Equipment will be returned at the Buyer's expense, including shipping and

GENERAL TERMS AND CONDITIONS OF SALE

ARTICLE 8 - PRICES

of the Equipment corresponds to the tax-exclusive price in effect at the time POOLSTAR receives the order. herwise stated on the purchase order, the prices listed include discounts, rebates, and reductions granted by POOLSTAR. POOLSTAR reserves the right to modify its pricing structure at any time without prior notice. The updated prices will apply to all orders

tter. garding an invoice must be submitted to POOLSTAR via registered mail with acknowledgment of receipt within fifteen ie invoice's receipt by the Buyer. Beyond this period, no claim will be considered.

ARTICI E 9 - PAYMENT TERMS

ART ILCLE 9 - PAYMENT TERMS The Equipment is payable upon order unless specific terms have been agreed to in writing by POOLSTAR. If, for any reason, the Buyer believes POOLSTAR owes them sums related to the execution of an order, such amounts cannot be offset without prior written consent from POOLSTAR seceipt of payment, unless otherwise expressly agreed in writing. Additionally, Buyer provides satisfactory guarantees.

uyer provides satisfactory guarantees. o discount will be granted for early payment. alivre to pay an order when due renders the entire outstanding amount immediately payable without prior notice and may result in

Faulte to pay an other when due renders the entire outstanding and/onin intrincedately payable without phot notice and high result in the subpension of deliveries. POOLSTAR reserves the right to revise payment terms in the event of significant changes to the Buyer's financial situation. In accordance with Article L441-10 of the French Commercial Code, any amount due to POOLSTAR that remains unpaid at the agreed date will automatically accrue a late payment penalty. This penalty will be calculated based on the European Central Bank's refinancing rate, increased by the 1(10) percentage points, starting from the due date until full payment. Additionally, a fixed recovery fee of forty (40) euros will be charged, without prejudice to POOLSTAR sight to claim additional compensation if justified expenses exceed this amount.

exceed this amount. In cases of non-payment, POOLSTAR may suspend production or delivery of other orders and/or cancel them without any liability for damages to the Buyer. If payment is delayed until after the receipt of the Equipment, any claims regarding the Equipment (e.g., defects or non-compliance) will not suspend payment unless proof of defectiveness is provided and acknowledged by POOLSTAR before the due date. Deposits received by POOLSTAR will remain their property as liquidated damages in the event the Buyer fails to meet their obligations, including costs for production, transport, and storage. ARTICLE 10 - LIABILITY

ARTICLE 10 - LIABILITY POOLSTAR's liable for any infered damage suffered by the Buyer in connection with the execution of an order, provided the Buyer takes all necessary measures to minimize their loss. POOLSTAR's hail note held liable for any infered damage, including but not limited to lost profits, loss of clientele, loss of opportunity, loss of revenue, or loss of earnings. In any evert, POOLSTAR's liability incurred in connection with the supply of Equipment for a specific order shall not exceed the value in any evert, POOLSTAR's liability incurred in connection with the supply of Equipment for a specific order shall not exceed the value

ARTICLE 11 - FORCE MAJEURE

ARTICLE 11 - FORCE MAJEURE POOLSTAR shall not be held liable for delays in the execution of its obligations or for failure to execute them if such delays or failures are due to a force majeure event as defined in Article 1216 of the French Civil Code and relevant French case law. POOLSTAR shall notify the Buyer in writing without delay. The parties will then consult to consider how to proceed with the order. If no agreement is reached within thirty (30) days from the notification of the force majeure event, and if the force majeure event and its effects persist beyond this period, either party shall be entitled to terminate the order by registered letter with acknowledgment of receipt, without any compensation owed to the other party. Termination shall take effect upon receipt of said registered letter with acknowledgment of receipt. If the order continues, the parties acknowledge that all obligations suspended due to the force majeure event will resume as soon as the force majeure event exerces.

ARTICLE 12 - INTELLECTUAL PROPERTY RIGHTS

ICLE 12 - INTELLECTUAL PROPERTY KIGHTS uprer is prohibited from reproducing or using POOLSTAR's name, logo, or trademarks in any media, informational, or online unication aimed at the general public or their own clients. Inical documents provided to the Buyer remain the exclusive property of POOLSTAR, which holds all intellectual property rights term. These documents must be returned upon reguest. uyer undertakes not to use these documents in any way that may infringe upon POOLSTAR's industrial or intellectual property and agrees not to disclose them to any third party without POOLSTAR's prior consent. The Buve

ARTICLE 13 - PERSONAL DATA PROTECTION

vovided by Buyers and processing it in compliance with applicable

- regulations.
 POOLSTAR informs the Buyer that this data will be used by its internal services, partners, and subsidiaries for:
 Processing the Buyer's order, tracking the order, managing involcing and payment, and handling any
 claims. This processing is based on the execution of the contract concluded with the Buyer and
 POOLSTAR's legal obligations regarding involcing.
 Enhancing and personalizing communication, particularly by sending newsiletters, letters, offers, and
 specific emails about its products. This processing is based on POOLSTAR's legalimate interest in
 conducting communication and prospecting activities within its business operations.
 Providing the requested data during the ordering process is contractual and mandatory to complete the order. Without it, the Buyer

Floring the requested data during the opening process is contractual and manually to complete the duel, whitevall, it are buyes will not be able to place an order. Processing and Personal data is stored in an active database for four (4) years from the date of the last order on a secure server within the European Union.

related to the execution of the order may be archived for five (5) years from the order date, a period necessary for POOI STAR

Data related to the execution of the order may be archived for five (5) years from the order date, a period necessary for POOLSTAR to establish, exercise, or defend its legal rights (statulory limitation period). POOLSTAR also reminds the Buyer that they may opt out of receiving promotional emails or letters at any time by contacting "contact@poolstar.fr" (right to object). Additionally, under applicable regulations, the Buyer may at any time exercise their rights of access, rectification, deletion, restriction of processing, data portability, and the right to define directives concerning the use of their personal data after their death. Requests should include a email address, full name, and postal address and may be submitted: By email to "contact@poolstar.fr" By email to "contact@poolstar.fr" By enail to loops a compaint with the relevant supervisory authority (CNIL in France). ADTICLE 14 _ INVAL INTY OF A CLAISE

ARTICLE 14 - INVALIDITY OF A CLAUSE

e invalidity and/or cancellation of any provision and/or clause of these general terms and conditions of sale shall not affect the idity of the other provisions and clauses, which shall remain in effect between the parties, unless the spirit and/or purpose of the

validity of the other provisions and causes, which sum terms in the second seco

ARTICLE 15 - APPLICABLE LAW AND JURISDICTION

Refect to Arrent Conduct of Sale are governed by French law, excluding any other applicable international conventions, luding the Vienna Convention on the International Sale of Goods of April 11, 1980. r any disputes relating to sales made by POOLSTAR and the application or interpretation of these General Terms and Conditions Sale, the sole competent authority shall be the Commercial Court of Aix-en-Provence, even in the case of summary proceedings

ultiple defendants. issuance and acceptance of drafts, direct payments, or any other method of payment shall not constitute a waiver of this

ARTICLE 16 – EEE PRODUCER IDENTIFICATION

the inique identifier FR037656, certifying registration in the EEE producer registry under Article L541-10-13 of the En ode, has been assigned by ADEME to Poolstar. This identifier certifies Poolstar's compliance with its registration ob lectrical and Electronic Equipment (EEE) producers and its market declarations with Ecosystem.

Signature preceded by the words "read and approved" and Company stamp







JETPRO THE PERFECT ALLIANCE BETWEEN PERFORMANCE AND DURABILITY

PAPARK SX

PUULEX

5-YEAR WARRANTY



Energy class A: thanks to its scop >7



NF certified: guarantee of quality

28		
28		I
7		I
		I
		I

Connected heat pump: Poolex application, IoT and Cloud Ready.



Zero carbon production objective

CUSTOMER SERVICE

FOR PROFESSIONALS

Monday to Friday 9am to 12.30pm and 2pm to 5pm*

(*Open until 6pm from mid-March to mid-September)

+33 (0)4 91 46 60 50

CUSTOMER SERVICE

FOR INDIVIDUALS

24/7 assistance.poolstar.fr/en



www.poolstar.fr